


Productive and cost effective A4 colour multifunctional

The imageRUNNER C1225iF is a feature rich A4 colour multifunctional device, providing fast and efficient document handling 'out of the box' so you can focus on your business priorities.



- Powerful A4 colour multifunctional with print, copy, colour scan, send and fax functionality, ideal for demanding small businesses
- Simple and user friendly operation with the 8.9 cm colour touch and swipe LCD display
- Canon's V² colour (Vivid and Vibrant) imaging technology ensures documents impress and stand out from the rest
- Seamlessly fits into your office environment with network connectivity and supporting IT standards such as PCL and Genuine Adobe PS
- Increase productivity with up to 1,100 sheet capacity and a Duplex Automatic Document Feeder (DADF)
- Scan and Send documents directly to a variety of destinations including email and shared folder
- Flexible mobile printing and scanning capabilities such as Apple AirPrint™, Mopria printing as well as mobile printing and scanning apps, support mobile worker efficiency
- Out of the box easy install; users can access the set-up guide via the user interface
- Consumables can be changed easily reducing down-time
- Standard toner included in the box giving up to 12 months colour printing¹
- Giving you peace of mind with Canon's standard warranty
- Energy consumption as little as 1 watt in sleep mode
- Compact and efficient space saving design

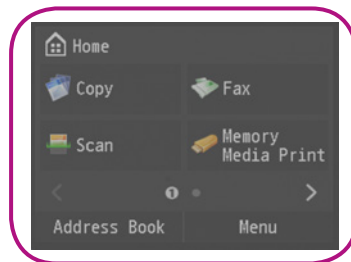

PRINT



COPY



FAX



SCAN

AirPrint™ and the AirPrint logo are trademarks of Apple Inc.

¹Actual results will vary and may be higher or lower than 12 months depending on individual usage. 12 months colour printing is based on a monthly print volume of 1,000 pages, 30% colour pages and 5% A4 coverage (ISO/IEC 24712). Standard Black toner yield is 12,000 pages. Yellow, Magenta and Cyan toner yield is 7,300 pages

Canon

Technical Specifications

imageRUNNER C1225iF

Machine type	Colour A4 Laser Multifunctional (Reader / Printer standard)	Scan resolution	BW Scan: 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi, 200 dpi x 400 dpi, 400 dpi, 600 dpi CL Scan: 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi
Available core functions	Print, Copy, Scan, Send and Fax standard for C1225iF	Double sided scanning	2-sided to 2-sided (Automatic)
Printer Specifications		Scan speed	BW single-sided: 25 ipm (A4, 300 dpi X 300 dpi), BW double-sided: 9 ipm (A4, 300 dpi X 300 dpi) CL single-sided: 25 ipm (A4, 300 dpi X 300 dpi), CL double-sided: 9 ipm (A4, 300 dpi X 300 dpi)
Print speed (BW/Colour)	25/25ppm (A4 Single-sided), 26/26ppm (A5 Single-sided), 25/25ppm (A4 Double-sided), 26/26ppm (A5 Double-sided)	Scan methods	Push Scan: Colour Send functionality is standard. Pull Scan: TWAIN/WIA Pull scanning available on all models. Scan to USB Memory Key: Available on all models Scan to mobiles, internet-connected devices: A range of solutions is available to provide scanning to mobile devices, internet-connected devices depending on your requirements. Please contact your sales representative for further information.
Printing method	Colour Laser Beam Printing	Pull scan specifications	<u>TWAIN/WIA Pull scanning</u> Windows XP Windows Vista/Windows 7/Windows 8/Window8.1 <u>Mac Scan (TWAIN only)</u> Mac OS X 10.5.8 or later *The drivers are available via http://software.canon-europe.com .
Print resolution	2400 dpi equivalent x 600 dpi, 600 dpi x 600 dpi		
Double sided printing	Automatic (Standard)		
Direct print	Direct printing available from USB memory key Supported file types: JPEG, TIFF, PDF		
Printing from mobiles or internet-connected devices and cloud-based services	A range of software is available to provide printing from mobile or internet-connected devices. Please contact your sales representative for further information.		
Paper input (Standard)	1 x 550-sheet (80 gsm) cassette, 100-sheet (80 gsm) multi-purpose tray	Send Specifications	Standard on all models 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi, 200 dpi x 400 dpi, 400 dpi, 600 dpi
Paper input (Option)	1 x 550-sheet cassette (80 gsm) (Cassette Feeding Unit-AJ1)	Optional/Standard	
Maximum paper input capacity	1200 sheets (80 gsm)	Send resolution	
Paper output capacity	250 sheets (80 gsm)	Destinations	E-Mail, Fax (not available for C1225), PC (SMB, FTP)
Finishing capabilities	Standard: Collate, Group	Address Book/Speed dials	LDAP (Max. 50 searchable), Local (Max. 300 including 281 Speed dials)
Supported media types	Cassette/s: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Envelopes* *Envelope support via standard cassette 1 only. Multi-purpose tray: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Transparency, Labels, Envelopes (No.10 (COM10), Monarch, ISO-C5, DL) Paper cassette 1: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Envelopes (No.10 (COM10), Monarch, DL) Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm) Paper cassettes 2: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm) Multi-purpose tray: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Custom size (98.4 mm to 216 mm x 148 mm to 355.6 mm), Envelopes (No.10 (COM10), Monarch, ISO-C5,DL) Cassette/s : 60 to 163 gsm Multi-purpose tray: 60 to 220 gsm Duplex: 60 to 163 gsm	File formats	SMB : JPEG, TIFF, PDF, Compact PDF, Searchable PDF E-mail : PDF, Compact PDF, Searchable PDF
Supported media sizes		Optional Universal Send Feature Sets	Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files.
Supported media weights		Fax Specifications	Standard for C1225iF
Page Description Language(s)	UFR II , PCL5c/6, Adobe PostScript Level 3 (Standard for C1225iF)	Optional/Standard	
Fonts	PCL fonts: 93 Roman, 10 Bitmap, 2 OCR fonts PS fonts: 136 Roman fonts	Modem speed	Super G3 33.6 kbps (Up to 3 seconds per page')
Operating System compatibility	UFR II: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later) PCL: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2 PS: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows8/Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later) PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows XP / Windows Vista / Windows 7 / Windows 8 / Windows 8.1 Please refer to http://software.canon-europe.com/ for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place.	Fax resolution	Standard: 200 x 100 dpi Fine: 200 x 200 dpi Super fine: 200 x 400 dpi Ultra fine: 400 x 400 dpi
Copy Specifications		Fax memory	Up to 512 pages ¹
Copy speed (BW/Colour)	Please refer to the quoted print speeds	Speed dials	Max. 281
First Copy Output Time (FCOT) (BW/Colour)	8.4 sec / 10.5 sec	Group dials / destinations	Max. 199 dials
Copy resolution	Reading: 600 dpi x 600 dpi Printing: 600 dpi x 600 dpi	Sequential broadcast	Max. 310 addresses
Multiple copy Reduction/Enlargement	Up to 999 copies Zoom: 25 - 400 % in 1 % increments Fixed Zoom Ratio: 25%, 50%, 70%, 100%, 141%, 200v%, 400%	Memory backup	Yes
Scan Specifications		Other features	Fax Forwarding, Dual Access, PC Fax (TX only)
Optional/Standard	Standard on all models (DADF 50 sheets)	General Specifications	
Supported media size/s	A4, A5, B5, Custom sizes: 140 mm to 216 mm x 128 mm to 356 mm (when fed through the DADF)	Warm-up time	Approx. 34 seconds from power ON
Supported media weight/s	Single-sided scanning: 50 to 105 gsm (DADF) Double-sided scanning: 64 to 105 gsm (DADF)	Recovery from sleep mode	10 seconds or less
		Interface type	USB 2.0 Hi-Speed,1000BaseT / 100Base-TX / 10Base-T, 1 x USB Host (Front), 1 x USB Host (Rear), 1 x USB device Recommended third party wireless solution is Silex SX-BR-4600 WAN. For more details please refer to www.silex-europe.com TCP/IP* (LPD / Port 9100 / WSD / IPP / IPPS / SMB / FTP), IPX/SPX (NDS, Bindery) *IPv4/IPv6 support
		Network protocols	1.0 GB
		Memory	QVGA Color LCD 8.9 cm (3.5 inch) touch / swipe supported display
		Control panel	Standard: 511 mm x 549 mm x 610 mm Optional: With Cassette Feeding Unit-AJ1: 511 mm x 549 mm x 1035 mm
		Dimensions (W x D x H)	852 mm x 843 mm (Main unit + Multi-purpose tray open + Cassette drawers open)
		Installation space (W x D)	Approx. 44 kg including toner
		Weight	Temperature: 10 to 30°C (50 to 86°F) Humidity: 20 to 80 % RH (no condensation)
		Operating environment	220 - 240 V (±10 %), 50/60 Hz (±2 Hz), 3.7 Amp
		Power source	Maximum: Approx. 1.5 KW Standby: Approx. 30 W Sleep mode: Approx. 1.0 W or less ²
		Power consumption	Time to put the device to sleep mode : 60 sec Typical Electricity Consumption (TEC) rating ³ : 0.8 kWh Only for C1225 (non Fax model) Plugin-off: 0.5W or less (Normal mode) Time to put the device to plugin-off: 4 hours

Technical Specifications

imageRUNNER C1225iF

Noise levels Sound Pressure ⁴ (reference data, LpAm, Bystander's position) Software and printer management

Security features

Consumables

Toner bottle

Sound Pressure Noise Levels:
Active: 50 dB
Standby: Inaudible (Less than 30dB)

eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics.

Remote Firmware System (GDLS):

Allows the remote distribution of firmware.

Remote User Interface (RUI): Web-based interface to each device that helps to provide remote device management and control.

Canon Driver Configuration Tool: A utility for changing the factory default settings of Canon print drivers

Standard:
IP/Mac Address Filtering, IPSEC, SNMP V3.0, IEEE 802.1X,
Secured Print, Department ID
Optional: Send PDF Security Feature Set-E1@E

Toner 34 Black / Cyan / Magenta / Yellow Toner
(Yield: BK 12,000 / CMY 7,300 pages) ⁵

Specifications for options

Cassette feeding unit

Hardware accessories ¹

Print controller accessories

Document security accessories

Other options

Name: Cassette Feeding Unit-AJ1

Description: Optional cassette feeding unit with 1 x 550 sheets paper capacity. Takes the cassette paper capacity up to 1,200 sheets.

Dimensions (W x D x H): 511 mm x 508 mm x 425 mm

Weight: Approx. 15 kg

HANDSET-J1 EUR/HANDSET-J1 SA

BARCODE PRINTING KIT-D1@E: Enables barcode printing via jet caps technology.

Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files.

Drum Unit 034 (BK / C / M / Y)

Waste Toner Box WT-A3:

Footnotes

¹ Based on ITU-T Standard Chart No. 1

² 1 watt sleep mode may not be possible in all circumstances. Certain network configurations and options may prevent the device from entering deep sleep mode. Please refer to the user guide for more information

³ Typical Electricity Consumption (TEC) rating represents the typical electricity consumed by a product during 1 week, measured in kilowatt-hours (kWh). The test methodology is defined by Energy Star (<http://www.eu-energystar.org>).

⁴ Declared noise emission in accordance with ISO 7779

⁵ Based on 5% coverage (A4)

All specifications subject to change without notice



SAP® Printer Vendor Solution



Canon Inc.
canon.com
Canon Europe
canon-europe.com
English edition
© Canon Europa N.V., 2014

Canon (UK) Ltd
Woodhatch
Reigate
Surrey RH2 8BF
Telephone no 01737 220000
Facsimile 01737 220022
canon.co.uk

Canon Ireland
3006 Lake Drive
Citywest, Saggart
Co.Dublin, Ireland
Telephone No: 01 2052400
Facsimile No: 01 2052525
canon.ie

Canon