imageRUNNER ADVANCE 8505 Pro /8595 Pro /8585 Pro

A highly productive and reliable mono digital press for professional and integrated environments



Advanced Productivity

- Produces fast print speeds of up to 105 ppm in black and white. It is capable of maintaining an outstanding output speed while printing on heavy media
- The flexible media handling capabilities enable you to choose from numerous paper sources and use heavy media up to 256 gsm
- Extensive paper supply of up to 7,700 sheets
- The optional imagePASS print controller, an ideal choice for busy operations, provides robust processing capabilities, variable data printing (VDP), and a print production workflow
- Create professional-looking reports, booklets, newsletters, manuals, proposals, and contracts with flexible finishing options such as professional punching, folding, document insertion, stapling and booklet making.
- Scan and convert documents to Searchable PDF, Microsoft® Word, and Microsoft® PowerPoint files through a single-pass duplexing document feeder that holds up to 300 originals

- An intuitive user interface with a large, responsive colour touchscreen makes carrying out tasks easy.
- Scalable support for mobile and flexible work styles can increase efficiency by allowing workers to capture or print documents and access certain cloud applications on the go.

Proven Reliability

- Canon's signature reliability and engine technologies provide reliable high quality output to meet the needs of busy departments and Central Reprographics Departments (CRDs)
- Designed to achieve maximum uptime with status notifications to help keep supplies replenished, intuitive user maintenance videos, the ability to replace toner on the fly, and automatic job re-routing (with optional solutions).

Integration and Fleet Management Efficiency

 Native support for industry standards such as Genuine Adobe PostScript and PCL, ensure seamless integration into networks and enterprise solutions













imageRUNNER ADVANCE 8505 Pro /8595 Pro /8585 Pro

- Canon's MEAP platform provides process optimisation, by integrating with a range of powerful document, capture and output management solutions.
- The ability to pre-configure devices makes installation easy and fleet management is simplified with the capability to synchronise settings across multiple devices.
- Canon's device management tools give you a centralised point of control across your entire fleet, including the ability to check device status and consumables, turn off devices remotely, capture meter readings, as well as manage address books and printer drivers.

Cost Management

- The ability to apply print policies, monitor output, and restrict usage by user helps reduce unnecessary printing, encourages cost recovery, and can help save money on paper and toner.
- Tight integration with output management solutions, such as uniFLOW, provides the ability to carry out detailed tracking, reporting, and cost analysis

Security

- Control who has access to the device with authentication by using the standard Universal Login Manager application.
- · Help prevent unauthorised distribution of sensitive information with an array of standard and optional document security features.
- Help ensure information privacy and security across your entire network with IPsec, port filtering capabilities, and SSL technology.

Environmentally responsible

- Fusing technologies, pO toner, and innovative sleep mode features help lower overall energy consumption. Consumes as little as 0.9 W in sleep mode
- Incorporates sustainable design, with the use of recycled materials and bio-based plastic, and a focus on minimising environmental impact
- ENERGY STAR qualified

Configuration

iR-ADV 8585 Pro



BOOKLET FINISHER-X1

- 3-tray, 4,250-sheet capacity
- Corner and double stapling up to 100 sheets
- Booklet-making up to 20 sheets and saddlefolding up to 5 sheets
- Supports optional internal 2/4 and 4-hole puncher (Puncher Unit-BG1 and BH1) and booklet trimming (Inner Booklet Trimmer-A1)



STAPLE FINISHER-X1

- 3-tray, 4,250-sheet capacity
- Corner and double stapling up to 100 sheets
- Supports optional internal 2/4 and 4-hole puncher (Puncher Unit- BG1 and BH1)



PAPER FOLDING UNIT-J1

Z-fold, C-fold, Half-fold, Accordion Z-fold, Doubleparallel Fold



MULTI FUNCTION **PROFESSIONAL PUNCHER-A1**

- Supports various die sets
 - Up to 256 asm
 - Supports A3, A4, A4R
 - 100,000 chip tray
 - Enhanced die durability



DOCUMENT INSERTION **UNIT-N1**

- Insert preprinted sheets
- Up to A3
- 400-sheet total capacity



PAPER DECK UNIT-E1

- 3,500-sheet
- Supports A4



PRINTER MODEL

- 3,500-sheet
- capacity 52 to 256 gsm
- Supports up to SRA3
- User adjustable



3-tray, 3,500 -sheet capacity

- Corner and double stapling up to 65 sheets (80 gsm)
- Booklet-making up to 20 sheets and non-staple saddle folded capacity up to 3 sheets (A3/A4R)
- Supports Eco stapling 4 sheets (80 gsm) and Staple On Demand 65 sheets (80 gsm)
- Supports optional 2/4 and 4 hole inner Puncher 2/4 Hole Puncher Unit-A1 and 4 Hole Puncher Unit-A1



STAPLE FINISHER-V1

- 3-tray, 3,500 -sheet capacity
- Corner and double stapling up to 65 sheets (80 gsm)
- Supports Eco stapling 4 sheets (80 gsm) and Staple On Demand 65 sheets (80 gsm)
- Supports optional 2/4 and 4 hole inner Puncher 2/4 Hole Puncher Unit-A1 and 4 Hole Puncher Unit-A1



Delivers fast processing speed, outstanding image quality, and time-saving workflow








imageRUNNER ADVANCE 8505 Pro /8595 Pro /8585 Pro

iR-ADV 8595 Pro / 8505 Pro

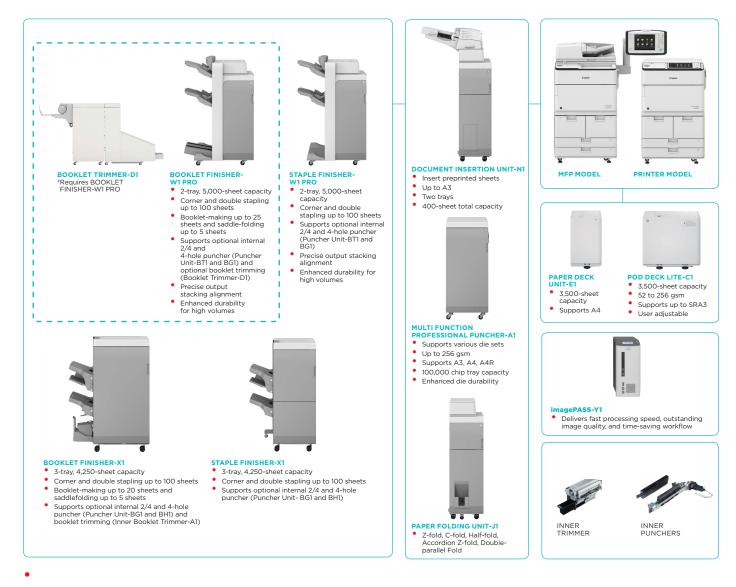

Technical Specifications

Machine type Core functions **Processor Speed** Control Panel

Memory Hard Disk drive Mirroring Hard Disk Drive Interface Connection

Paper Input (Standard)

Paper Input (Option)

Maximum Paper Input Capacity Paper output capacity Monochrome Laser Multifunctional

Print, Copy, Scan, Send, Store and Optional Fax Canon Dual Custom Processor (Shared) 10.4 inch TFT LCD SVGA Color Touchpanel MFP Model 10.1 inch TFT LCD WSVGA Color Touchpanel

Standard: 3.0 GB RAM

Standard: 250 GB Maximum: 1TB Optional 250 GB, 1 TB), Method: Raid1

NETWORK Standard: 10Base-T/100Base-TX/ 1000Base-T, Wireless LAN (IEEE 802.11 b/g/n); Optional: NFC

OTHERS Standard: USB 2.0 (Host) x2, USB 3.0 (Host) x1, USB 2.0 (Device) x1; Optional: Serial Interface,Copy Control Interface

2 x 1500-sheet cassettes + 2 x 550-sheet cassettes (80 gsm) 100-sheet multi-purpose tray (80 gsm)

Additional 3,500 sheets (80 gsm) (POD DECK LITE-C1 or PAPER DECK UNIT-E1)

7,700 sheets (80 gsm)

With External Finishers: Max. 5,000 sheets (A4)

Upper Left/Right Cassettes(1/2): Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Letterhead, Bond paper

Lower Cassettes (3/4):

Lower Cassettes (5/4): Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Prepunched paper, Letterhead, Bond paper, Tab paper - Tab paper can be fed from cassette 3 & 4 when the optional TAB FEEDING ATTACHMENT KIT-B1 is installed.

TAB FEEDING AT IACHTERS TO SEED THE MULTI-PROPERTY OF THE PROPERTY OF THE PROP POD DECK LITE-C1: Thin paper, Plain paper, Recycled paper,

Supported media sizes

Supported media weights

Dimensions (H x W x D)

Installation Space (H x W x D)

Warm-up Time

Colour paper, Heavy paper, Pre-punched paper, Letterhead, Bond paper, Transparency, Labels, Tab paper

PAPER DECK UNIT-E1: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Letterhead, Bond pape

Upper Left/Right Cassettes(1/2):

Standard size: A4

Lower Cassettes (3/4):

Standard size: 330 mm x 483 mm, 320 mm x 450 mm (SRA3), 305 mm x 457 mm, A3, A4, A4R, A5R Custom size: 139.7 mm x 182 mm to 330.2 mm x

Standard size: 330 mm x 483 mm, 320 mm x 450 mm (SRA3), 305 mm x 457 mm, A3, A4, A4R, A5R

Custom size: 100 mm x 148 mm to 330 mm x 487.7 mm Free size: 100 mm x 182 mm to 330.2 mm x 487.7 mm

POD DECK LITE-C1: A3,A4,A4R,A5R,SRA3, 330 mm x 483 mm, 305 mm x 457 mm and Custom size (139.7 mm x 182 mm to 330.2 mm x 487.7 mm)

PAPER DECK UNIT-E1:

Cassettes: 52 to 220 gsm Multi-purpose tray: 52 to 256 gsm

Duplex: 52 to 220 gsm

From Power On: 60 Seconds or Less From Sleep Mode: 60 Seconds or Less

Quick Startup Mode: 4 Seconds

1481 mm x 770 mm x 1252 mm

4,098 mm x 1,617 mm (POD DECK LITE-C1 + BOOKLET FINISHER WI + DOCUMENT INSERTION UNIT-N1 + PAPER HOLDING UNIT-J1 + BOOKLET TRIMMER-D1)

Approx. 240 kg



Technical Specifications

imageRUNNER ADVANCE 8505 Pro /8595 Pro /8585 Pro

Printing method **Print Speed**

Print Resolution Page description languages Double Sided Printing **Direct Print**

Printing from mobile and cloud

Fonts

Operating System

COPY SPECIFICATIONS (MFP MODELS ONLY)

Copy Speed

First-Copy-Out Time

SCAN SPECIFICATIONS (MFP MODELS ONLY)

Standard

Supported media size/s

Supported media weight/s

Scan Resolution

Acceptable Originals

Scan Speed (BW/Color: A4

Double sided scanning

Paper Capacity

Monochrome laser beam printing

iR-ADV 8585 Pro: 85 ppm (A4), 44 ppm (A3), 63 ppm (A4R), 85 ppm (A5R)

iR-ADV 8595 Pro: 95 ppm (A4), 50 ppm (A3), 69.1 ppm (A4R),

IR-ADV 8395 Pro: 95 ppm (A4), 50 ppm (A3), 69.1 ppm (A4R), 95 ppm (A5R) IR-ADV 8505 Pro: 105 ppm (A4), 54 ppm (A3), 76.3 ppm (A4R), 105 ppm (A5R)

1200 dpi x 1200 dpi, 600 dpi x 600 dpi UFR II, PCL 5e/6 (optional), Adobe PS 3 (optional)

Automatic (Standard)

Direct printing from USB memory key, Advanced box, Remote UI

and Web Access Requires PS kit or Direct Print Kit.

- Requires PS kit or Direct Print Kit.

A range of software and MEAP-based solutions is available to provide printing from mobile devices or internet-connected devices and cloud-based services.

PCL fonts: 38 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T (Japanese, Korean, Simplified and Traditional Chinese)

Requires optional PCL INTERNATIONAL FONT SET-AI.

PS fonts: 136 Roman

UFRII: Server 2003/Server 2003 R2Vista/Server 2008/ Windows 7/Server 2008 R2/Windows 8/Server 2012/ Windows 8.1/Server 2012 R2/Windows 10, MAC OS X (10.5.8 or later)

6.1) Server 2003/Server 2003 R2Vista/Server 2008/ Windows 7/Server 2008 R2/Windows 8/Server 2012/ Windows 8.1/Server 2012 R2/Windows 10

PS: Server 2003/Server 2003 R2Vista/Server 2008/Windows 7/ Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10, MAC OS X (10.5.8 or later)

PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows Vista/Windows 7/Windows 8/Windows 8.1/ Windows 10

iR-ADV 8585 Pro: 85 ppm (A4), 44 ppm (A3), 63 ppm (A4R),

iR-ADV 8595 Pro: 95 ppm (A4), 50 ppm (A3), 69.1 ppm (A4R), 95 ppm (A5R)

iR-ADV 8505 Pro: 105 ppm (A4), 54 ppm (A3), 76.3 ppm (A4R), 105 ppm (A5R)

Approx. 2.7 seconds or less Reading: 600 dpi x 600 dpi Printing: 1200 dpi x 1200 dpi

Colour flatbed scan unit and 300-sheet duplex automatic document feeder (1-Pass duplex colour scan).

Colour flatbed plus Single-pass duplex automatic document feeder (1-Pass Duplex Scan)
A3, A4, A4R, A5, A5R

Single-sided scanning: 38 to 220 gsm/64 to 220 gsm (BW/CL) Double-sided scanning: 50 to 220 gsm/64 to 220 gsm (BW/CL) Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows Vista/7/8/8.1/10 Windows Server 2003/ Server 2003 R2/ Server 2008/ Server 2008 R2/ Server

2012/ Server 2012 R2 100 x 100 dpi, 150 x 150 dpi, 200 x 100 dpi, 200 x 200 dpi, 200 x 400 dpi, 300 x 300 dpi, 400 x 400 dpi, 600 x 600 dpi Platen: Sheet, Book, 3-Dimensional Objects (up to 2kg)

Feeder size: A3, A4, A4R, A5, A5R

Feeder weight: 1-sided scanning: 38 to 220 gsm/64 to 220 gsm (BW/CL)

2-sided scanning: 50 to 220 gsm/64 to 220 gsm (BW/CL)

Single-sided (A4, 300 dpi): 120/120 ipm; Single-sided (A4, 600 dpi): 120/60 ipm (BW/CL); Double-sided (A4, 600 dpi): 120/60 ipm Double-sided (A4, 300 dpi): 240/220 ipm (BW/CL) 300 Sheets (80 gsm)

2-sided to 2-sided (Automatic)

Optional/standard Destination

Colour Mode

Send resolution

Communication protocol

FAX SPECIFICATIONS

Optional/standard Maximum Number of Connection Lines Modem Speed Compression Method Resolution Sending/Recording Size

FAX memory Memory backup

STORE SPECIFICATIONS

Advanced space

Advanced Space available disc space

Memory Media

SECURITY SPECIFICATIONS

Authentication

Document

ENVIRONMENTAL Operating Environment

Power source Power consumption

Noise levels

Standard on all models

E-Mail/Internet FAX (SMTP), SMB, FTP, WebDAV E-many internet FAX (SMIP), SMB, FTP, WebDAV
Auto Colour Select (Full Colour, Grayscale),
Auto Colour Select (Full Colour) Black-and-White)
Full Colour, Grayscale, and Black-and-White
100 x 100 dpi, 150 x 150 dpi, 200 x 100 dpi,
200 x 200 dpi, 200 x 400 dpi, 300 x 300 dpi, 400 x 400 dpi,
600 x 600 dpi

File: FTP. SMB. WebDAV

Final/I-Fax: SMTP, POP3, I-Fax (Simple, Full)
Standard: TIFF, JPEG, PDF (Compact, Searchable, Apply policy,
Optimise for Web, PDF A/1-b), XPS (Compact, Searchable),
Office Open XML (PowerPoint, Word)

Optional on all models

Super G3: 33.6 kbps , G3: 14.4 kbps MH MR MMR IRIG

400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi A3, A4, A4R, A5, A5R

Up to 6,000 pages

Communication Protocol: SMB or WebDAV Supported Client PC: Windows (Windows Vista/ 7/8/8.1/10) Concurrent Connections (Max.): SMB: 64 WebADV: 3 (Active Sessions)

Approx. 16 GB (Standard HDD)

Approx. 480 GB (1 TB HDD) Standard: USB Memory

Standard: Universal Login Manager, User Authentication, DepartmentID Authentication, (Device and Function Level Log-in), Access Management System Optional: My Print Anywhere secure print (Requires uniFLOW)

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption(FIPS140-2 Validated) Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal, Data Loss Prevention (Requires uniFLOW)

Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP

Standard: Secure Print, Adobe LiveCycle* Rights Management ES2.5 Integration, Encrypted PDF Optional: Encrypted Secure Print, User and Device signatures,

Secure Watermarks, Document Scan locking

Temperature: 10 to 30 °C (50 to 86 °F) Humidity: 20 to 80 % RH (no condensation) 220-240 V (±10 %), 50/60 Hz (±2 Hz), 10 Amp

Maximum: Approx. 2.4 KW
Standby: Approx. 2.2 W
Energy Saver Mode: Approx. 193 W
Sleep mode: Approx. 0.9 W or less
Typical Electricity Consumption (TEC) rating:
9.1 kWh (IR-ADV 8585 Pro), 10.9 kWh (IR-ADV 8595 Pro),
10.7 kWh (IR-ADV 8505 Pro)

Sound Pressure Active: 75 dB or Less Standby: 58 dB or Less ENERGY STAR* Qualified

Software and Solutions




























Certifications and compatibility

















Canon Inc.

Canon Europe canon-europe.com Canon Middle East FZ-LLC DIC Bldg No 9, Office 109 P.O. Box 500007 Dubai UAE Tel: +97 14391 5050 canon-me.com



English edition © Canon Europa N.V, 2016