

No one does it like you

Canon

PACKED WITH POWER.

The imageRUNNER ADVANCE DX 6700i Series delivers fast, high quality black and white prints suited to fast paced office environments.



Canon imageRUNNER ADVANCE DX 6700i Series



COST CONTROL

Advanced functions for big cost-saving

- Save your business money by reducing your paper wastage utilising settings such as forced job hold at the device, and blank page removal.
- Enable print policies to monitor output while also restricting users from overuse.
- Save even further with remote support to help diagnose and solve issues fast, rather than taking up the valuable time of in-house IT staff.
- Track usage and control your costs utilising Canon's uniFLOW Online Express free software.



MOBILITY

Connect on-the-go

- Simple and easy mobile connectivity with in-built WiFi plus options to connect through Bluetooth and Near Field Communication (NFC).
- Give your team flexibility so projects don't need to stop just because they are away from the office.
- Intuitive printing and scanning using Canon PRINT Business plus built in support for Apple® AirPrint®, Mopria™ and Google Cloud™.



SECURITY

Protect sensitive information with enhanced security capabilities

- Advanced control over document access ensures documents are only seen by those that are authorised.
- Integrates with existing, third-party Security Information and Event Management (SIEM) systems to help provide real-time comprehensive insights into potential threats to the network and printers.
- Technology to verify that the device boot process, firmware, and applications initialise without alterations or tampering time and money spent on various projects.



PERFORMANCE

Delivering advanced in-house finishing

- Speed up your scanning process with a single pass document feeder with up to 270 ipm.
- Huge paper supply capacity with up to 7,700 sheets with added paper decks.
- Versatile finishing capabilities and large range of media support.
- Standard Universal Send Advanced Feature Set enables you to send documents in Trace & Smooth PDF, OCR compatible PDF/XPS/OOXML.



INTEGRATION

Systems seamlessly converge for smooth operation and easy handling

- Canon's MEAP platform works to integrate both new and existing document, capture and output management systems while being partnered with relevant support technology.
- Collaborate with key line of business applications and external systems.
- For smooth, hassle-free projects, scan and convert to Microsoft® Word and PowerPoint® files.
- Supports integration with popular cloud services like Google Drive™ and Box*.



SUSTAINABILITY

Environmentally conscious technology works to achieve green initiatives for your business

- The iR-ADV DX 6700i runs efficiently to help eliminate unnecessary power consumption and is designed to reduce emissions.
- Motion sensors, sleep recovery triggers and remote shutdown are all features that contribute to ongoing sustainability.
- Minimise paper wastage with default print settings including double-sided print and black and white.

* Requires uniFLOW Online Express or uniFLOW Online subscription.

DEVICE SECURITY


The imageRUNNER ADVANCE DX 6700i Series feature the ability to help verify that the device boot process, firmware, and applications initialise at startup, without any alterations or tampering by malicious third parties.

During operation, McAfee Embedded Control™ utilises a whitelist to protect against malware and tampering of firmware and applications.**



CONFIGURATION

** These features are available on third generation imageRUNNER ADVANCE Gen III Series III or imageRUNNER ADVANCE DX models only. McAfee Embedded Control™ requires Unified Firmware Platform v3.9 or above.

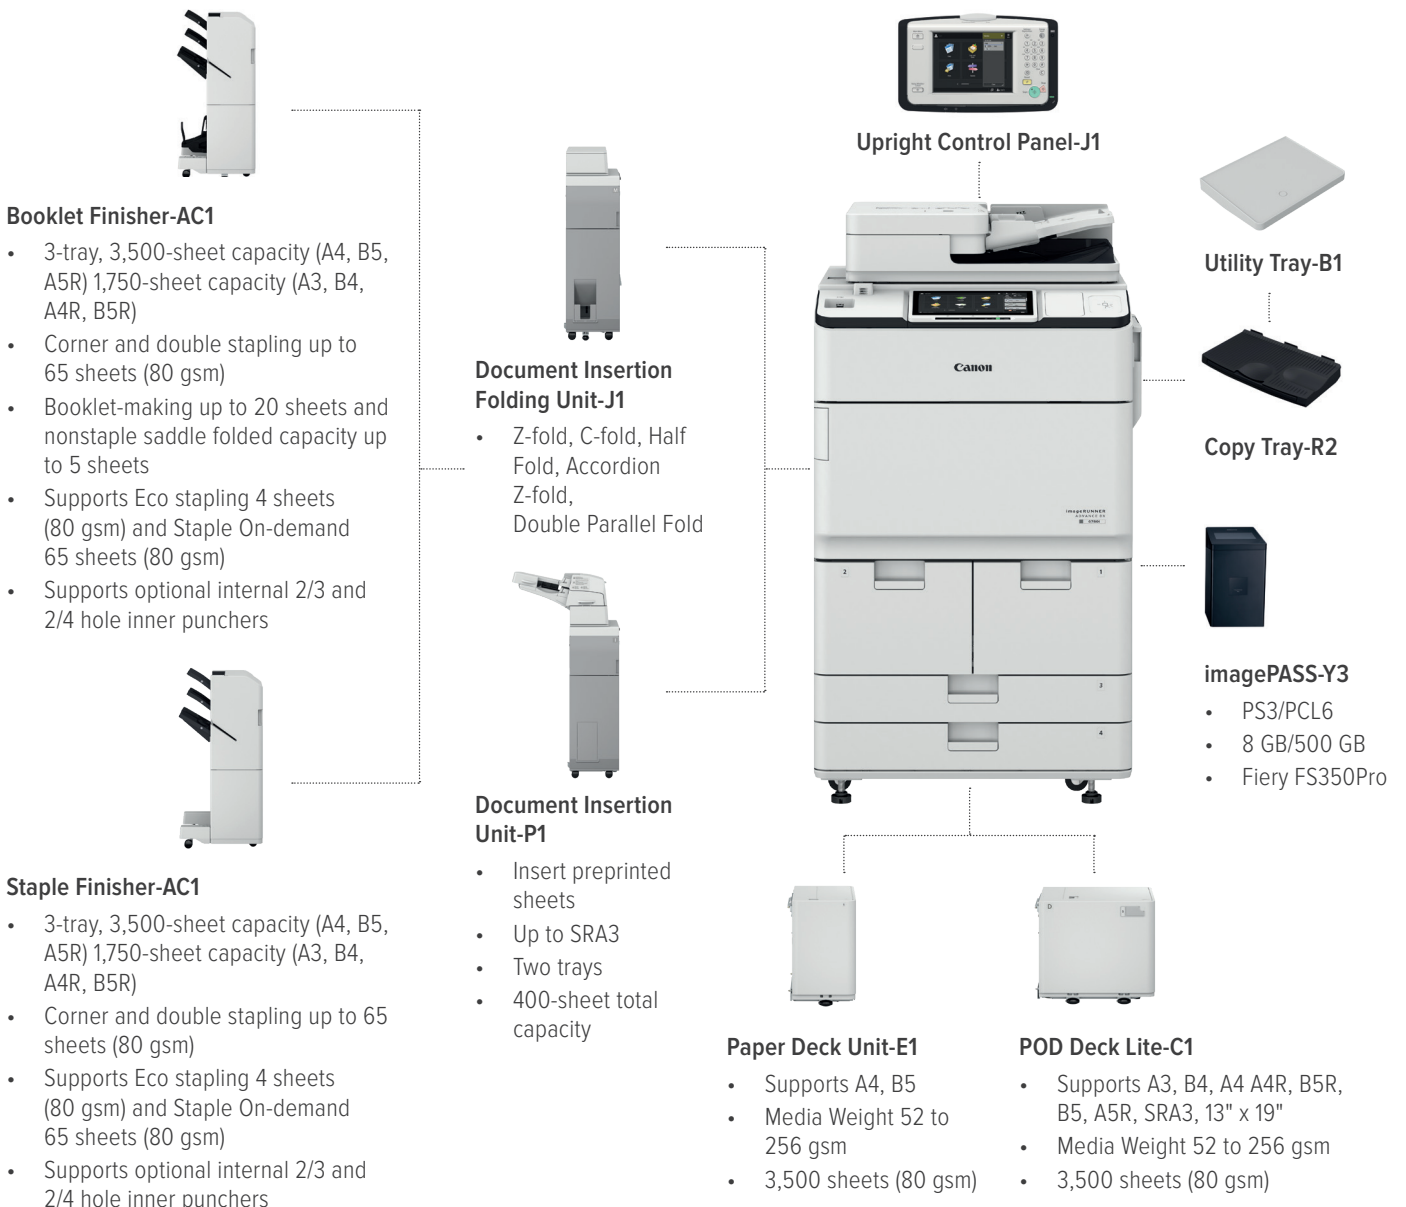

imageRUNNER ADVANCE DX 6700i Series SPECIFICATIONS

imageRUNNER
ADVANCE DX

Main Unit	
Machine Type	A3 Monochrome Laser Multifunctional
Core Functions	Print, Copy, Scan, Send, Store and Optional Fax
Processor	1.75GHz Dual Core Processor
Control Panel	Standard: 10.1" TFT LCD SVGA Colour Touch Panel Optional: 10.4" TFT LCD SVGA Colour Upright Touch Panel
Memory	Standard: 3.0 GB RAM
Hard Disk Drive	Standard*: 320 GB (available disk space: 250 GB) Optional: 250 GB, 1 TB * A different initial HDD may be used.
Mirroring Hard Disk Drive	Optional
Interface Connection	Network: Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11b/g/n) Optional: NFC, Bluetooth Low Energy Others: Standard: USB 2.0 (Host) x 1, USB 3.0 (Host) x 1, USB 2.0 (Device) x 1 Optional: Serial Interface, Copy Control Interface
Paper Supply Capacity (A4, 80 gsm)	Standard: 4,200 Sheets 250-sheet Multi-purpose Tray x 1 1,500-sheet Paper Deck x 2 550-sheet Paper Cassette x 2 Maximum: 7,700 Sheets (with Paper Deck Unit-E1 or POD Deck Lite-C1)
Paper Output Capacity (A4, 80 gsm)	250 Sheets (with Copy Tray-R2) Maximum: 3,500 Sheets (with Staple Finisher-AC1 or Booklet Finisher-AC1)
Finishing Capabilities	With Options: Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On-demand, Document Insertion, Z-fold, C-fold
Supported Media Types	Multi-purpose Tray: Thin, Plain, Recycled, Colour, Heavy, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Tab Paper Decks (Right/Left): Thin, Plain, Recycled, Colour, Heavy, Bond, Pre-punched, Letterhead Paper Cassettes (Upper/Lower): Thin, Plain, Recycled, Colour, Heavy, Bond, Pre-punched, Letterhead, Tab* *Tab Feeding Attachment-B1 is required.
Supported Media Size	Multi-purpose Tray: Standard Size: A3, A4, A4R, A5 ⁺ , A5R, A6R ⁺ , B4, B5, B5R Custom Size: 100.0 x 148.0 mm to 297.0 x 487.7 mm Free Size: 100.0 x 148.0 mm to 297.0 mm x 487.7 mm *1 Supported media weights: more than 64 gsm *2 Supported media weights: more than 91 gsm Paper Decks (Right/Left): Standard Size: A4, B5 Paper Cassettes (Upper/Lower): Standard Size: A3, A4, A4R, A5R, B4, B5, B5R Custom Size: 139.7 x 182.0 mm to 297 x 487.7 mm
Supported Media Weights	Multi-purpose Tray: 52 to 256 gsm Paper Decks (Right/Left): 52 to 220 gsm Paper Cassettes (Upper/Lower): 52 to 220 gsm Duplex: 52 to 220 gsm
Warm-up Time	Quick Start-up Mode: 4 seconds or less* * Time from device power on to when the copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 30 seconds or less From Power On: 30 seconds or less* * Time from device power-on, until copy ready (not print reservation).
Dimensions (W x D x H)	Standard: 670 x 770 x 1185 mm With Optional Upright Control Panel: 1,170 x 770 x 1,252 mm
Installation Space (W x D)	Basic: 1,533 x 1,353 mm (with Multi-purpose tray/Upper-right cover open + Front cover open + Copy Tray) Fully Configured: 2,436 x 1,353 mm (with POD Deck Lite-C1 + Document Insertion/Folding Unit-J1 + Booklet Finisher-AC1 or Staple Finisher-AC1 + Main unit Front cover open)
Weight	IR-ADV DX 6780i/6755i: Approx. 219 kg ¹ , Approx. 223 kg ² *1 Including ADF, flat touch panel and the toner bottle. *2 Including ADF, optional upright touch panel and the toner bottle.

Print Specifications	
Print Speed	IR-ADV DX 6780i: Up to 80 ppm (A4), Up to 40 ppm (A3), Up to 58 ppm (A4R), Up to 35 ppm (A5R) IR-ADV DX 6755i: Up to 55 ppm (A4), Up to 32 ppm (A3), Up to 40 ppm (A4R), Up to 35 ppm (A5R)
Print Resolution (dpi)	1,200 x 1,200
Page Description Languages	Standard: UFR II, PCL6 Optional: Adobe® PostScript® 3 [*]
Direct Print	Supported File Types: PDF, EPS, TIFF/JPEG, and XPS
Printing from Mobile and Cloud	AirPrint®, Mopria™, Google Cloud Print™, Canon Business PRINT, and uniFLOW Online. A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
Fonts	PS Fonts: 136 Roman PCL Fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T ^{††} (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts ^{‡‡} *1 Optional PCL International Font Set-A1 is required. *2 Optional Barcode Printing Kit-D1 is required.
Print Features	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/ Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
Operating System As of July, 2019	UFR II: Windows®7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019, MAC OS X (10.10 or later) PCL: Windows®7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019 PS: Windows®7/ 8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019, MAC OS X (10.10 or later) PPD: Windows®7/8.1/10, MAC OS X (10.9 or later)

Copy Specifications	
Copy Speed	IR-ADV DX 6780i: Up to 80 ppm (A4), Up to 40 ppm (A3), Up to 58 ppm (A4R), Up to 35 ppm (A5R) IR-ADV DX 6755i: Up to 55 ppm (A4), Up to 32 ppm (A3), Up to 40 ppm (A4R), Up to 35 ppm (A5R)
First-Copy-Out Time (A4)	IR-ADV DX 6780i: Approx. 3.1 seconds or less IR-ADV DX 6755i: Approx. 3.3 seconds or less
Copy Resolution (dpi)	600 x 600
Multiple Copies	Up to 9,999 copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	Variable Zoom: 25% to 400% (1% Increments) Preset Reduction/Enlargement: 25%, 50%, 61%, 70%, 81%, 86%, 100% (1:1), 115%, 122%, 141%, 200%, 400%
Copy Features	Preset R/E Ratios by Area, Two-sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Acid Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Free Size Original, Reserved Copy, Copy Sample

Scan Specifications	
Type	Single Pass Duplexing Automatic Document Feeder (2-sided to 2-sided (Automatic)). Detect Feeder Multi Sheet Feed is supported.
Document Feeder Paper Capacity (80 gsm)	Up to 200 Sheets
Acceptable Originals and Weights	Platen: Sheet, Book, and 3-Dimensional Objects (Height: Up to 50 mm, Weight: up to 2kg) Document Feeder Media Weight: 1-sided Scanning: 38 to 220 gsm (BW, CL) 2-sided Scanning: 38 to 220 gsm (BW, CL) An acceptable weights of A6R or smaller is 50 to 220 gsm.
Supported Media Size	Platen Max. Scanning Size: Up to 297.0 x 431.8 mm Document Feeder Media Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R, Custom Size: 70.0 x 139.7 mm to 304.8 x 431.8 mm
Scan Speed (ipm: BW/CL; A4)	1-sided Scanning: 135/135 (300 x 300 dpi, Send), 80/80 (600 x 600 dpi, Copy) 2-sided Scanning: 270/270 (300 x 300 dpi, Send), 160/90 (600 x 600 dpi, Copy)
Scan Resolution (dpi)	Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600
Pull Scan	Colour Network ScanGear2. For both TWAIN and WIA. Supported OS: Windows®7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016
Scan Method	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Box, Scan to Network, Scan to USB Memory Key, Scan to Mobile Devices, Scan to Cloud (uniFLOW Online)

Send Specifications	
Destination	Standard: E-mail/Internet FAX (SMTP), SMB3.0, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax
Address Book	LDAP (2,000)/Local (1,600)/Speed Dial (200)
Send Resolution (dpi)	Push: Up to 600 x 600 Pull: Up to 600 x 600
Communication Protocol	File: FTP (TCP/IP), SMB3.0 (TCP/IP), WebDAV E-mail/I-Fax: SMTP, POP3
File Format	Standard: TIFF, JPEG, PDF (Compact, Searchable, Apply Policy, Optimise for Web, PDF/A-1a, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages

Fax Specifications	
Maximum Number of Connection Lines	4
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
Sending/Receiving Size	Sending: A3, A4, A4R, A5 ⁺ , A5R ⁺ , B4, B5 ⁺ , B5R ⁺ Receiving: A3, A4, A4R, A5R, B4, B5, B5R *1 Sent as A4 *2 Sent as B4 Short
Fax Memory	Up to 30,000 Pages (2,000 Jobs)
Speed Dials	Max. 200
Group Dials/Destinations	Max. 199 Dials
Sequential Broadcast	Max. 256 Addresses
Memory Backup	Yes
Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

Store Specifications	
Mail Box (Number Supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 30,000 Pages (2,000 Jobs) Stored
Advanced Box	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 8.1/10 Concurrent Connections (Max.): SMB:64, WebDAV:3
Advanced Box Available Disc Space	Standard: 16 GB (With Option: Max. 480 GB)
Advanced Box Features	Authentication for Advanced Box Log-in, Sort Function, Printing a PDF File with a Password, Search, File Preview, Authentication Management, Open to Public, URI TX, Backup/Restore

Security Specifications	
Authentication and Access Control	Standard: User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print™), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle® Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Box Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File Send Functions, Confirming FAX Number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark) *1 Requires uniFLOW Online/uniFLOW
Network Security	TLS 1.3, IPsec, IEEE802.1X Authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), G3 FAX Separation from LAN, USB Port Separation from LAN, Prohibit the Execution of Files Stored in Advanced Box in the MFP, Scan and Send-voice Concerns for E-mail Reception
Device Security	Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwrite Erase, HDD Lock), Standard HDD Initialisation, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection)
Device Management and Auditing	Administrator Password, Digital Certificate and Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting

Environmental Specifications	
Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
Power Source	220–240V, 50/60Hz, 10A
Power Consumption	Maximum: Approx. 2,400 W Standby: Approx. 256 W ¹ Sleep Mode: Approx. 0.9 W ² *1 Reference value: measured one unit *2 0.9 W sleep mode may not be possible in all circumstances due to certain settings.

Consumables	
Toner	NPG-54 Toner Black
Toner (Estimated Yield @ 6% Coverage)	56,000 Pages
Software and Printer Management	
Tracking and Reporting	Universal Login Manager (ULM), uniFLOW Online Express
Remote Management Tools	eMaintenance, Content Delivery System
Scanning Software	Network ScanGear
Optimisation Tools	Canon Driver Configuration Tool, NetSpot Device Installer
Platform	MEAP (Multifunctional Embedded Application Platform)
Fiery Print Controller Specifications	
Optional/Standard	Optional on all models
Name	Canon imagePASS-Y3 V1.1 (Server)
Print Resolution (dpi)	1,200 x 1,200, 600 x 600
Standard Page Description Language(s)	PCL6, Adobe® PostScript® 3™
Memory	8 GB (2 x 4 GB)
Hard Disk Drive	500 GB SATA
Processor Speed	Intel Pentium G4400 (3.3 GHz)
System	FS350 Pro
Fonts	PS: 138 Fonts PCL: 113 Fonts
Supported Operating Systems	Windows® 7 64 bit/Windows® 8.1 64 bit/Windows® 10 64 bit/Windows® Server 2008 R2 64 bit only/Windows® Server 2012 R2 64 bit only (Only Printer driver support)/Windows® Server 2012 R2 64 bit only/Windows® Server 2016 R2 64 bit only, MAC OS (10.11, 10.12, 10.13, 10.14)
Interface	2 x Ethernet (1000Base-T/100Base-TX/10Base-T), USB 3.0 x 2 (rear), x 3 (front on Fiery Quick Touch™), USB 2.0 x 4 (rear)
Network Protocols	TCP/IP (FTP, SMTP, POP, HTTP, SNMP, LDAP, SLP, SMB, LPD, IPP, WS-Discovery, Bonjour, Direct Mobile Printing, Port 9100, SNT, 802.1X, DHCP, DNS, NTP)
Direct Print	PDF 1.7, EPS, TIFF 6, JDF1.4/JMF (Optional)
VDP	FreeForm v1, v2.1, PPM, PDF/VT-1, PDF/VT-2, Creo VPS
Standard Features	Fiery Command WorkStation 6/Paper Catalog/Fiery Remote Scan/Fiery Hot Folders & Virtual Printers/Fiery JDF
Fiery Print Controller Options	Fiery Impose/Fiery Compose/Fiery Impose and Compose/Removable HDD kit/Fiery Image Viewer
HW Platform	NX One
Base OS	Windows® 10 IoT Enterprise 2019 LTSC
Power Source	AC100–240V, 50Hz/60Hz, 3.0A (100V) – 1.5A (240V)
Maximum Power Consumption	53 W
Dimensions (W x D x H)	203 x 248 x 384 mm
Weight	Server Unit Only: Approx. 5.9 kg
Paper Supply Options	
Paper Deck Unit-E1	Paper Capacity: 3,500 Sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Colour, Heavy, Bond, Pre-punched, Letterhead Paper Size: A4, B5 Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 340 x 630 x 572 mm (attached to the main unit) Weight: Approx. 34 kg
POD Deck Lite-C1	Paper Capacity: 3,500 Sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Colour, Heavy, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Tab Paper Size: A3, A4, A4R, A5R, B4, B5R, B5 Custom Size: 139.7 x 182.0 mm to 297.0 x 487.7 mm Paper Weight: 52 to 256 gsm Power Source: 220–240V, 50/60Hz, 1.2A Dimensions (W x D x H): 633 x 686 x 574 mm (attached to the main unit) Weight: Approx. 68 kg
Output Options*	
* Paper capacity may vary with different of paper type/size.	
Copy Tray-R2	Provides a simple tray for basic output needs. Capacity: 250/100 sheets (1-sided/2-sided, 80 gsm) Dimensions (W x D x H): 420 x 382 x 175 mm
Staple Finisher-AC1	Tray Capacity (with 80 gsm paper): Upper Tray: A4, A5, A5R, A6R, B5: 250 Sheets A3, A4R, B4, B5R: 125 Sheets Mid Tray: Same as Upper Tray Lower Tray: A4, A5, A5R, B5: 3,000 Sheets A3, A4R, B4, B5R: 1,500 Sheets A6R: 250 Sheets Paper Weight: 52 to 256 gsm Staple Position: Corner, Double Staple Capacity: A4, B5: 65 Sheets (52 to 90 gsm) A3, A4R, B4: 30 Sheets (52 to 90 gsm) Eco Staple: A3, A4: 5 Sheets (52 to 64 gsm) 4 Sheets (65 to 81.4 gsm) 3 Sheets (82 to 105 gsm) Staple On-demand: 65 sheets (52 to 90 gsm) Power Source: From the main unit Dimensions (W x D x H): 656 mm x 623 mm x 1,195 mm (when the extension tray and rotary tray are extended) Weight: Approx. 36 kg
Booklet Finisher-AC1	(Includes the above Staple Finisher-AC1 basic staple specifications) Saddle Stitch Paper Size: A3, A4R, B4 Custom Size (195.0 x 270.0 mm to 297.0 x 431.8 mm) Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (Including 1 cover sheet up to 256 gsm) Non-staple Saddle Folded Bunch Capacity: Up to 3 sheets (52 to 105 gsm) Power Source: From the Main Unit Dimensions (W x D x H): 656 x 623 x 1,195 mm (when the extension tray and rotary tray are extended) Weight: Approx. 60 kg

2/3 Hole Puncher Unit-A1	(Requires the Staple Finisher-AC1 or Booklet Finisher-AC1) Two or Three Holes Acceptable Punch Paper Weight: 52 to 256 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Three holes: A3, A4, B4, B5 Power Source: From the Finisher
4 Hole Puncher Unit-A1	(Requires the Staple Finisher-AC1 or Booklet Finisher-AC1) Four Holes Acceptable Punch Paper Weight: 52 to 256 gsm Acceptable Punch Paper Size: Four holes: A3, A4, A4R, A5, B4, B5, B5R Power Source: From the Finisher
Document Insertion Unit-P1	(Requires either the Staple Finisher-AC1 or Booklet Finisher-AC1) Number of Trays: 1 Tray Capacity: 100 Sheets (with 80 gsm paper) Acceptable Paper Type: Thin, Plain, Recycled, Colour, Heavy, Coated, Bond, Letterhead, Tab Acceptable Paper Sizes: A3, A4, A4R, B4, B5, B5R Acceptable Paper Weight: 60 to 256 gsm Power Source: 100–240V, 50/60Hz, 1.0A Dimensions (W x D x H): 247 x 679 x 1,242 mm (attached to the device: width excluding document tray) Weight: Approx. 40 kg
Document Insertion/Folding Unit-J1	(Requires either the Staple Finisher-AC1 or Booklet Finisher-AC1) Number of trays: 1 Supported Folding Type: Z-Fold, C-Fold Acceptable Paper Type: Insertion Unit: Thin, Plain, Recycled, Colour, Heavy, Coated, Bond, Letterhead, Tab Z-fold/C-fold: Thin, Plain, Recycled, Colour Acceptable Paper Sizes: Insertion Unit: A3, A4, A4R, B4, B5, B5R Z-fold: A3, A4R, B4 C-fold: A4R Acceptable Paper Weight: Insertion Unit: 60 to 256 gsm Z-fold/C-fold: 60 to 105 gsm Output Capacity (with 80 gsm paper): Insertion: 100 Sheets Z-fold*: A3, B4: 30 Sheets A4R: 10 Sheets C-fold: A4R: 40 Sheets * Z-Fold output to the Staple Finisher-AC1 or Booklet Finisher-AC1 Power Source: 100–240V, 50/60Hz, 1.0A Dimensions (W x D x H): 247 x 679 x 1,242 mm (attached to the device: width excluding document tray) Weight: Approx. 76 kg

Hardware Accessories

Card Readers	Copy Card Reader-F1, Copy Card Reader Attachment-A4
Others	Upright Control Panel-J1, Utility Tray-B1, Tab Feeding Attachment Kit-B1, Shift Tray-F1, Numeric Keypad-A1, Finisher Jogger Kit-A1

Security Options

Data Security	HDD Mirroring Kit-J1, 2.5 inch/250 GB HDD-N1, 2.5 inch/1 TB HDD-P1
---------------	--

System and Controller Options

Print Accessories	PCL International Font Set-A1, PS Printer Kit-BC1
Barcode Printing	Barcode Printing Kit-D1
EFI-Fiery Based Controller	imagePASS-Y3 V1.1
EFI-Fiery Based Controller Options	Fiery Impose, Fiery Compose, Fiery Impose and Compose, Fiery ImageViewer, Removable HDD Kit-B6
System Accessories	Serial Interface Kit-K3, NFC Kit-E1, Connection Kit-A2 for Bluetooth LE, Copy Control Interface Kit-A1
FAX Accessories	Super G3 FAX Board-AS1, Super G3 2nd Line Fax Board-AS1, Super G3 3rd/4th Line Fax Board-AS1, Remote Fax Kit-A1, IP FAX Expansion Kit-B1

Other Options

Accessibility Accessories	ADF Access Handle-A1, Voice Guidance Kit-G1, Voice Operation Kit-D1
Consumables	Staple Cartridge-X1, Staple Cartridge-Y1

For information and services contact

Canon Australia Pty Ltd	1800 444 199	canon.com.au/business
Canon New Zealand Ltd	0800 222 666	canon.co.nz/business



No one does it like you

Canon