# Canon

Color imageCLASS MF8580(dw/MF8280(w

# **Revolutionizing Today's Workspace**

# Color Laser Multifunction Printers PRINT | COPY | SCAN | FAX

- Wireless Connectivity lets you print from almost anywhere in your home or office
- Print on the go with Canon Mobile Printing,\*
   Apple® AirPrint™, and Google Cloud Print™
- Easily access the scan, eco-copy, and secure print (MF8580Cdw only) functions right from the control panel with the Simple Solution Keys
- Seamlessly navigate through all the features with the 7-line color LCD display
- Print/Copy in both color and black and white at blazing speeds:
   Up to 21 ppm\*\* (MF8580Cdw)
   Up to 14 ppm\*\* (MF8280Cw)
- Duplex Versatility allows two-sided printing, copying, scanning, and PC faxing (MF8580Cdw only)
- Send scanned documents and forward received faxes to a recipient through e-mail or file server (MF8580Cdw only)
- Energy Saver mode uses only 2W of energy
- Single-Cartridge System for easy supply replenishment















# Advanced technologies for your home and office



#### **Print Documents On the Go**

Print a variety of file types, Web pages, and images on the go with the Canon Mobile Printing app.\*



Wherever you are, print from your smartphone or computer using Google Cloud Print enabled apps.



Apple AirPrint allows you to print documents, e-mails, Web pages, and photos to your compatible imageCLASS devices from your iPhone®, iPad®, or iPod touch®.

## **Department ID Management**

The Color imageCLASS MF8580Cdw and MF8280Cw feature password-protected Department ID Management.

Device usage and color access can be monitored and controlled, which can help to reduce costs. With this feature, up to 300 IDs can be monitored.



### **Environmentally Conscious**

Help reduce your power consumption with Canon's efficient Energy Saving Mode. The MF8000 Series uses just two watts of energy during Energy Saving mode and meets ENERGY STAR® Guidelines, helping you save money on energy costs.





#### **Secure Print**

The Color imageCLASS MF8580Cdw features Secure Print to help protect the privacy of your printed documents. To help ensure that your documents end up in the right hands, follow the simple steps below:

- 1. Enter code on PC.
- 2. Select the one-touch "Secure Print" button on the device.
- 3 Enter the code on the MF8580Cdw.
- 4. Pick up the secure print.



- \* Requires Canon Mobile Printing app available free on the App store. Compatible with iPhone 5, iPhone 4S, iPhone 4, iPad mini, iPad 4, the new iPad, iPad 2, and the original iPad running OS 6.0.1 - 6.1.2.
- \*\* Print speed is based on internal testing. Print speed may vary depending on the number of copies selected, as well as on the settings for size, type, and orientation of paper.

#### **Generation Green**

The MF8000 Series is part of Canon's Generation Green Program, which highlights the company's commitment to sustainability. Learn more at www.usa.canon.com/green.




## **Color LCD Display**

The intuitive seven-line Color LCD Display allows users to navigate through the menu seamlessly. The wide screen and color display are easy to read, helping you to complete tasks in a breeze.



|  | Color imageCLASS MF8580Cdw   | Color imageCLASS MF8280Cw  |  |
|--|--|--|--|
|  | BASIC SPECI  |  |  |
| Functions  | Print/Copy/Scan/Fax/PC Fax   |  |  |
| Print Speeds<br>(default print mode: 2-sided)  | Up to 10 ppm* (2-sided, plain paper letter) Up to 21 ppm* (1-sided, plain paper letter)  | Up to 14 ppm* (1-sided, plain paper letter)  |  |
| Connectivity   | USB 2.0 Hi-Speed, 10/100 Base-T E  | thernet, 802.11 b/g/n Wireless**   |  |
|  | Windows® 8, Windows 7, Windows Server® 2012, Windows Server 2008 R2, Windows Server 2008,  |  |  |
| Operating Systems  | Windows Vista®, Windows Server 2003, Windows® XP, Mac® OS X 10.5.8 and up, Linux (print only) (Drivers available for download from www.usa.canon.com)  |  |  |
|  | Duplex Automatic Document Feeder: 50-sheet <sup>†</sup>  | Simplex Automatic Document Feeder: 50-sheet <sup>†</sup>   |  |
|  | Standard Cassette: 250-sheet;† 16-58 lb. Bond;   | Standard Cassette: 150-sheet;† 16-58 lb. Bond;   |  |
| Paper Handling   | Letter, Legal, A4, A5,* B5, Statement, Executive  Multipurpose Tray: 50-sheet;† 16-58 lb. Bond   | Letter, Legal, A4, A5, B5, Statement, Executive  Multipurpose Tray: 1-sheet;† 16-58 lb. Bond   |  |
| raper Handling   | Platen Size: Up  |  |  |
| ļ  | ADF Size: 5" x 5.  |  |  |
|  | Output Tray: 125 Si  | neets (face-down)  |  |
| Duplex   | All Mode (Print, Copy, Scan, Fax)  | N/A  |  |
| Duty Cycle   | Up to 40,000 Pages per Month   | Up to 30,000 Pages per Month   |  |
| Security   | IEEE802.1x, SNMPv3, HTTPS, IPsec, Secure Print,  | IEEE802.1x, SNMPv3, HTTPS, IPsec,  |  |
|  | Department ID Management   | Department ID Management   |  |
| ·  | PRINTER SPEC   |  |  |
| First-Print Time   | Black/Color: 14.3 seconds or less (Letter) <sup>††</sup>   | Black/Color: 18 seconds or less (Letter) <sup>††</sup>   |  |
| Printer Language   | UFR II LT (Host-based), PCL 6 (5e,XL)  | UFR II LT (Host-based)   |  |
| Print Resolution   | 1200 x 1200 dpi equivalent (240  | 1 1 1  |  |
| Print Features   | Print Modes (Watermark, Page Composer,<br>Toner Saver, Poster, Booklet)  | Print Modes (Watermark, Page Composer,<br>Toner Saver, Poster)   |  |
| Print Memory   | 512MB (Shared with Copy Memory)  | 256MB (Shared with Copy Memory)  |  |
| Mobile Print   |  |  |  |
| noone i int  | Canon Mobile Printing,** Apple AirPrint, Google Cloud Print  COPIER SPECIFICATIONS   |  |  |
|  | Black: Approx. 15.3 Seconds <sup>†††</sup> (Letter)  | Black/Color: Approx. 19 Seconds <sup>†††</sup> (Letter)  |  |
| First Copy Time  | Color: Approx. 16 Seconds <sup>†††</sup> (Letter)  | Black Color. Approx. 13 occords (Ection)   |  |
| Copy Resolution  | Up to 600  | x 600 dpi  |  |
| Halftones  | 256 Levels   |  |  |
| Max. Number of Copies  | 99 Co  | pies   |  |
| Copy Features  | Reduction/Enlargement 25%-400%, Collate, 2 on 1, 4 on 1, I   | D Card Copy, Frame Erase, Copy Modes (Text/Photo/Map)  |  |
|  | SCANNER SPE  | CIFICATIONS  |  |
| Scan Type  | Color Contact Image Sensor (CIS); 24-bit C   | olor Depth; TWAIN and WIA Compatible   |  |
| Scan Speed   | Black-and-white: 21 ipm≜   |  |  |
| Scan Resolution  | Color: 10 ipm <sup>▲</sup> Up to 600 x 600 dpi (optical); Up to 9600 x 9600 (interpolated)   |  |  |
| Output File Formats  | PDF (Compact), PDF, JPEG, TIFF   |  |  |
| Scan Features  | Scan to USB, Push (Scan to PC) and Pull Scan,  | Scan to USB, Push (Scan to PC) and Pull Scan   |  |
| Journ Cutures  | Scan to E-mail, Scan to Network Folder   | Count to Cob, 1 doin (Count to 1 o) and 1 an Coun  |  |
|  | FAX SPECIF   | ICATIONS   |  |
| Modem Speed  | Up to 33.6 Kbps (Super G3)⁴⁴   |  |  |
| Fax Resolution   | Up to 406 x 391  | dpi (ultra fine)   |  |
| Fax Memory   | Up to 512 Sheets <sup>▲▲</sup>   |  |  |
| Speed Dialing  | Up to 181 Dials (One-Touch plus Coded Dials)   |  |  |
| Group Dialing  | 199 Destinations   |  |  |
|  | 210 Destinations   |  |  |
| Sequential Broadcasting  | 210 Desti  |  |  |
| Sequential Broadcasting<br>PC Fax  | 210 Desti<br>Yes (sendi  | nations  |  |
|  |  | nations  |  |
| PC Fax<br>Fax Forwarding   | Yes (sendi<br>Yes (Fax→Fax, E-mail, SMB)<br>Fax/Telephone Auto Switch, Remote Reception, I   | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection,  |  |
| PC Fax   | Yes (sendi<br>Yes (Fax→Fax, E-mail, SMB)<br>Fax/Telephone Auto Switch, Remote Reception, I<br>Error Correction Mode, Auto Redial, Act  | nations<br>ng only)<br>Yes (Fax→Fax)<br>Dual Access, Distinctive Ring Pattern Detection,<br>ivity Result and Management Reports  |  |
| PC Fax<br>Fax Forwarding<br>Fax Features   | Yes (sendi<br>Yes (Fax→Fax, E-mail, SMB)<br>Fax/Telephone Auto Switch, Remote Reception, I<br>Error Correction Mode, Auto Redial, Act<br>GENERAL SPE   | nations ng only) Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  |  |
| PC Fax Fax Forwarding Fax Features Dimensions  | Yes (sendi<br>Yes (Fax→Fax, E-mail, SMB)<br>Fax/Telephone Auto Switch, Remote Reception, I<br>Error Correction Mode, Auto Redial, Act<br>GENERAL SPE<br>17"(W) x 19.1"(D) x 18.9"(H)   | nations  ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  |  |
| PC Fax Fax Forwarding Fax Features Dimensions Weight   | Yes (sendi<br>Yes (Fax→Fax, E-mail, SMB)<br>Fax/Telephone Auto Switch, Remote Reception,<br>Error Correction Mode, Auto Redial, Act<br>GENERAL SPE<br>17"(W) x 19.1"(D) x 18.9"(H)<br>63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  | nations  ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)   |  |
| PC Fax Fax Forwarding Fax Features Dimensions Weight Package Weight  | Yes (sendi<br>Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception,<br>Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  | nations  ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.   |  |
| PC Fax Fax Forwarding Fax Features Dimensions Weight Package Weight  | Yes (sendi<br>Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception,<br>Error Correction Mode, Auto Redial, Act<br>GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i   | nations  ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  1 (Extended warranty available)  |  |
| PC Fax Fax Forwarding Fax Features  Dimensions Weight Package Weight Warranty  | Yes (sendi Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i ENVIRONMENTAL   | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  ¶ (Extended warranty available)  SPECIFICATIONS   |  |
| PC Fax Fax Forwarding Fax Features  Dimensions Weight Package Weight Warranty  | Yes (sendi Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i  ENVIRONMENTAL  0.9kWh  | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  1 (Extended warranty available)  SPECIFICATIONS  0.4kWh   |  |
| PC Fax<br>Fax Forwarding<br>Fax Features   | Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) × 19.1"(D) × 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i  ENVIRONMENTAL  0.9kWh  During Operation: Approx. 450W  Standby: Approx. 23W   | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  n  (Extended warranty available)  SPECIFICATIONS  0.4kWh  During Operation: Approx. 400W  Standby: Approx. 23W  |  |
| PC Fax Fax Forwarding Fax Features  Dimensions Weight Package Weight Warranty  Typical Energy Consumption (TEC)                    | Yes (sendi Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i ENVIRONMENTAL  0.9kWh  During Operation: Approx. 450W Standby: Approx. 23W Energy Saver: Approx. 2W   | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  17"(Extended warranty available)  SPECIFICATIONS  0.4kWh  During Operation: Approx. 400W  Standby: Approx. 23W  Energy Saver: Approx. 2W  |  |
| PC Fax Fax Forwarding Fax Features  Dimensions Weight Package Weight Warranty  Typical Energy Consumption (TEC)                    | Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i  ENVIRONMENTAL  0.9kWh  During Operation: Approx. 450W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation:  | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  1 (Extended warranty available)  SPECIFICATIONS  0.4kWh  During Operation: Approx. 400W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation:  |  |
| PC Fax Fax Forwarding Fax Features  Dimensions Weight Package Weight Warranty  Typical Energy Consumption (TEC)                    | Yes (sendi Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i  ENVIRONMENTAL  0.9kWh  During Operation: Approx. 450W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation: 50.3dB in Color (sound pressure)  | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  1 (Extended warranty available)  SPECIFICATIONS  0.4kWh  During Operation: Approx. 400W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation: 46.7dB in Color (sound pressure)   |  |
| PC Fax Fax Forwarding Fax Features  Dimensions Weight Package Weight Warranty  Typical Energy Consumption (TEC)  Power Consumption | Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i  ENVIRONMENTAL  0.9kWh  During Operation: Approx. 450W Standby: Approx. 23W Energy Saver: Approx. 23W  Energy Saver: Approx. 2W  During Operation: 50.3dB in Color (sound pressure) 50.9dB in B/W (sound pressure) 64.9dB or less in Color (sound power)   | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  1 (Extended warranty available)  SPECIFICATIONS  0.4kWh  During Operation: Approx. 400W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation: 46.7dB in Color (sound pressure) 47.5dB in B/W (sound pressure) 61.3dB or less in Color (sound power)  |  |
| PC Fax Fax Forwarding Fax Features  Dimensions Weight Package Weight Warranty  Typical Energy Consumption (TEC)                    | Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) × 19.1"(D) × 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i  ENVIRONMENTAL  0.9kWh  During Operation: Approx. 450W  Standby: Approx. 23W  Energy Saver: Approx. 2W  During Operation: 50.3dB in Color (sound pressure) 50.9dB in B/W (sound pressure)  | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  ¶ (Extended warranty available)  SPECIFICATIONS  0.4kWh  During Operation: Approx. 400W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation: 46.7dB in Color (sound pressure) 47.5dB in B/W (sound pressure)  |  |
| PC Fax Fax Forwarding Fax Features  Dimensions Weight Package Weight Warranty  Typical Energy Consumption (TEC)  Power Consumption | Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i  ENVIRONMENTAL  0.9kWh  During Operation: Approx. 450W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation: 50.3dB in Color (sound pressure) 50.9dB in B/W (sound pressure) 64.9dB or less in Color (sound power) 64.5dB or less in B/W (sound power) During Standby:  | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  18 (Extended warranty available)  SPECIFICATIONS  0.4kWh  During Operation: Approx. 400W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation:  46.7dB in Color (sound pressure) 47.5dB in B/W (sound pressure) 61.3dB or less in Color (sound power) 61.6dB or less in B/W (sound power) During Standby:  |  |
| PC Fax Fax Forwarding Fax Features  Dimensions Weight Package Weight Warranty  Typical Energy Consumption (TEC)  Power Consumption | Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-inential Environmental Environmental O.9kWh  During Operation: Approx. 450W  Standby: Approx. 23W  Energy Saver: Approx. 2W  During Operation:  50.3dB in Color (sound pressure) 50.9dB in B/W (sound pressure) 64.9dB or less in Color (sound power) 64.5dB or less in B/W (sound pressure)  During Standby: Inaudible (sound pressure)                 | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  18 (Extended warranty available)  SPECIFICATIONS  0.4kWh  During Operation: Approx. 400W  Standby: Approx. 23W  Energy Saver: Approx. 2W  During Operation:  46.7dB in Color (sound pressure)  47.5dB in B/W (sound pressure)  61.3dB or less in Color (sound power)  61.6dB or less in B/W (sound power)  During Standby: Inaudible (sound pressure)   |  |
| PC Fax Fax Forwarding Fax Features  Dimensions Weight Package Weight Warranty  Typical Energy Consumption (TEC)  Power Consumption | Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i  ENVIRONMENTAL  0.9kWh  During Operation: Approx. 450W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation: 50.3dB in Color (sound pressure) 50.9dB in B/W (sound pressure) 64.9dB or less in Color (sound power) 64.5dB or less in B/W (sound power)  During Standby: Inaudible (sound pressure) 36.5dB or less (sound power)             | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  n  (Extended warranty available)  SPECIFICATIONS  0.4kWh  During Operation: Approx. 400W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation: 46.7d8 in Color (sound pressure) 47.5d8 in B/W (sound pressure) 61.3dB or less in Color (sound power) 61.6dB or less in B/W (sound power)  Linaudible (sound pressure) 22.5dB or less (sound power)                                   |  |
| PC Fax Fax Forwarding Fax Features  Dimensions Weight Package Weight Warranty  Typical Energy Consumption (TEC)  Power Consumption | Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i  ENVIRONMENTAL  0.9kWh  During Operation: Approx. 450W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation: 50.3dB in Color (sound pressure) 50.9dB in B/W (sound pressure) 64.9dB or less in Color (sound power) 64.5dB or less in B/W (sound power)  During Standby: Inaudible (sound pressure) 36.5dB or less (sound power)  WHAT COMES | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  n (Extended warranty available)  SPECIFICATIONS  0.4kWh  During Operation: Approx. 400W  Standby: Approx. 23W  Energy Saver: Approx. 2W  During Operation:  46.7dB in Color (sound pressure) 47.5dB in B/W (sound pressure) 61.3dB or less in Color (sound power) 61.6dB or less in B/W (sound power)  During Standby: Inaudible (sound pressure) 22.5dB or less (sound power)                  |  |
| PC Fax Fax Forwarding Fax Features  Dimensions Weight Package Weight Warranty  Typical Energy Consumption (TEC)  Power Consumption | Yes (Fax→Fax, E-mail, SMB)  Fax/Telephone Auto Switch, Remote Reception, I Error Correction Mode, Auto Redial, Act  GENERAL SPE  17"(W) x 19.1"(D) x 18.9"(H)  63.1 lb. (w/o CRG); 68.3 lb. (w/ CRG)  Approx. 81.0 lb.  One-year limited exchange/carry-i  ENVIRONMENTAL  0.9kWh  During Operation: Approx. 450W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation: 50.3dB in Color (sound pressure) 50.9dB in B/W (sound pressure) 64.9dB or less in Color (sound power) 64.5dB or less in B/W (sound power)  During Standby: Inaudible (sound pressure) 36.5dB or less (sound power)             | nations ng only)  Yes (Fax→Fax)  Dual Access, Distinctive Ring Pattern Detection, ivity Result and Management Reports  CIFICATIONS  17"(W) x 19.1"(D) x 16.9"(H)  52 lb. (w/o CRG); 57.3 lb. (w/ CRG)  Approx. 67.2 lb.  Approx. 67.2 lb.  18" (Extended warranty available)  SPECIFICATIONS  0.4kWh  During Operation: Approx. 400W Standby: Approx. 23W Energy Saver: Approx. 2W  During Operation: 46.7dB in Color (sound pressure) 47.5dB in B/W (sound pressure) 61.3dB or less in Color (sound power) 61.6dB or less in B/W (sound power)  During Standby: Inaudible (sound pressure) 22.5dB or less (sound power) |  |

- \* Print speed is based on internal testing. Print speed may vary depending on the number of copies selected, as well as on the settings for size, type, and orientation of paper.
- \*\* Wireless performance may vary based on terrain/distance between printer and wireless network clients.
- † Based on 20 lb. Bond paper.
- $^{\dagger\dagger}\,\mbox{May}$  vary depending on the output environment.
- ††† Letter-sized, after being restored from Energy Saver mode.
- A5 paper is supported in Simplex mode only.
- •• Requires Canon Mobile Printing app available free on the App store. Compatible with iPhone 5, iPhone 4S, iPhone 4, iPad mini, iPad 4, the new iPad, iPad 2, and the original iPad running OS 6.0.1 6.1.2.
- Based on Letter-sized scanning at 300 x 300 dpi.
   The Public Switched Telephone Network currently supports fax modern speeds of 28.8 Kbps or lower, depending on telephone line conditions. Sending and receiving fax machines need to conform to ITU-T v.34 guidelines.
- AAA Based on ITU-T #1 Chart (standard mode).
- ■Warranty program is subject to certain conditions and restrictions. See the warranty card for details.
- ■■ Declared noise emission in accordance with ISO 9296.

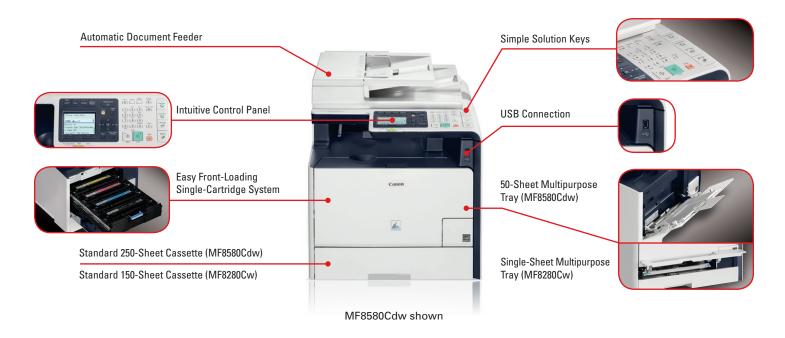

## Color imageCLASS MF8580Cdw and Accessories

| Color imageCLASS MF8580Cdw  | 6849B001AA |
|---|------------|
| Cartridge 118 Black (yields approx. 3,400 pages based on ISO/IEC Standard)    | 2662B001AA |
| Cartridge 118 VP Black (yields approx. 6,800 pages based on ISO/IEC Standard) | 2662B004AA |
| Cartridge 118 Yellow (yields approx. 2,900 pages based on ISO/IEC Standard)   | 2659B001AA |
| Cartridge 118 Magenta (yields approx. 2,900 pages based on ISO/IEC Standard)  | 2660B001AA |
| Cartridge 118 Cyan (yields approx. 2,900 pages based on ISO/IEC Standard)     | 2661B001AA |
| Cassette Feeding Unit-V1 (250-sheet Cassette)                                 | 0732A024AB |
| imageCLASS Low-Volume Virtual CarePAK (2-Year Exchange/Carry-in)              | 5120B040AA |
| imageCLASS Low-Volume eCarePAK (2-Year Exchange/Carry-in)                     | 5707B023AA |

### Color imageCLASS MF8280Cw and Accessories

| Color imageCLASS MF8280Cw  | 6848B001AA |
|--|------------|
| Cartridge 131 Black (yields approx. 1,400 pages based on ISO/IEC Standard)   | 6272B001AA |
| Cartridge 131 Black H (yields approx. 2,400 pages based on ISO/IEC Standard) | 6273B001AA |
| Cartridge 131 Yellow (yields approx. 1,500 pages based on ISO/IEC Standard)  | 6269B001AA |
| Cartridge 131 Magenta (yields approx. 1,500 pages based on ISO/IEC Standard) | 6270B001AA |
| Cartridge 131 Cyan (yields approx. 1,500 pages based on ISO/IEC Standard)    | 6271B001AA |
| imageCLASS Low-Volume Virtual CarePAK (2-Year Exchange/Carry-in)             | 5120B040AA |
| imageCLASS Low-Volume eCarePAK (2-Year Exchange/Carry-in)                    | 5707B023AA |

# Canon

1-800-OK-CANON www.usa.canon.com

Canon U.S.A., Inc. One Canon Park Melville, NY 11747

As an ENERGY STAR partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. CANON, IMAGECLASS, and SUPER G3 are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. All other referenced product names and marks are trademarks of their respective owners. Specifications and availability subject to change without notice. ©2013 Canon U.S.A., Inc. All rights reserved.

















