



OKI proColor™  
pro930

The tabloid printer for incredible color output  
and consistently accurate color matching

**OKI®**



# OKI proColor™ pro930



A digital color printer on which you can stake your reputation. Your customers judge you by the quality of your work. So you need a short-run color printer that delivers quality and performance... versatile paper handling... ease of use... proven reliability... job management... and flawless color matching every time.

The new **OKI proColor™ pro930** Tabloid/A3 digital color printer from Oki Data will give you all that—and more:

- **EFI® Fiery® controller provides industry leading color control and job management**
- **High Definition (HD) Color printing for breathtaking output**
- **Media flexibility and cost-efficiency**
- **Short-run production printing capability**

**The pro930: the color printer you can count on.**

#### **OKI proColor™ pro930 Highlights:**

**Embedded EFI® Fiery® System 8e Controller with SmartRIP® technology for fast, automated color workflow and job management**

**High Definition (HD) Color printing technology for increased color depth and richer hues—even on ordinary papers**

**Single Pass Color™ digital technology—straight-through print path handles up to 330 gsm, tabloid-extra sheets (12" x 18"), and banners nearly 4' long**

**1200 x 1200 dpi print resolution for clear, sharp text and graphics**

**Up to 31 ppm in Color and up to 36 ppm in Black & White (Monochrome)<sup>1</sup>**

**1 GB RAM and powerful 1 GHz Intel® Celeron® M processor**

**Network connectivity, hard disk, and duplex (2-sided) printing standard**

**2-Year On-Site warranty<sup>2</sup> for low operating costs**



<sup>1</sup> Published performance results based on laboratory testing. Individual results may vary.

<sup>2</sup> Available in the U.S. only

## EFI® color technology for consistency and accuracy

The OKI proColor™ pro930 is the perfect solution for satisfying the needs of color-centric clientele. It has an embedded EFI Fiery® System 8e controller, which provides print control and job management functionality to optimize document workflow and ensure consistently exceptional results.

With the EFI Fiery controller and EFI Command WorkStation™, you can manage or preview print jobs in the queue, balance the workflow of networked devices, manage color profiles, and save templates on the 40 GB hard disk drive for faster processing and re-printing of jobs.

## HD Color printing for breathtaking output

The pro930 also delivers consistent professional-quality color through OKI HD Color printing technology, automatically calibrating colors, making color corrections on the fly, and supporting EFI Spot-On®, PANTONE®, SWOP®, Japan Color, Euroscale and custom ink simulations.

That, and up to 1200 x 1200 dpi resolution, enables the pro930 to deliver fine details and stunning color depth, whether on glossy stock, custom or specialty media, or even ordinary paper.

## Media flexibility and cost-efficiency, too

The pro930 produces a wide range of documents on a variety of paper weights and sizes. Single Pass Color™ technology and the straight-through paper path of the pro930 allow for faster color and mono print speeds, minimal paper jams, and smooth handling.

Features like Auto Media Detect automatically adjust the printer to your required media weight, and Auto Color Balance ensures that output remains consistent from start to finish.

## Short-run color printing

The pro930 is also a short-run production printer that easily and efficiently handles 20 lb. bond to 190 lb. index (75 gsm to 330 gsm), envelopes, letter, legal and tabloid-extra (12" x 18") sheets, 3" x 5" cards and custom sizes ranging to 12.9" x 47.24" banners.

## The answer to your most demanding needs

The OKI proColor Series pro930 from Oki Data Americas, Inc.: high quality and low operational costs—the right Digital Color Printer for your color-sensitive, short-run print projects.



Single Pass Color™ technology and straight-through paper path handle thick paper stock and banner sheets.



The pro930 printer holds up to 2,880 sheets, with options.



## Specifications

<b>Performance</b>	Print Speed <sup>1</sup>	Letter/A4 – up to 31 ppm Color, 36 ppm Mono; Tabloid/A3 – up to 17 ppm Color, 20 ppm Mono
	Time to 1st Page <sup>1</sup>	10.5 sec. Color, 9 sec. Mono
	Warm-up Time	85 sec. or less from Power On
	Processor	1 GHz Intel® Celeron® M; embedded EFI® Fiery® System 8e Controller
	Monthly Duty Cycle	150,000 pages max.
<b>Print Quality</b>	Resolution	HD Color Technology: 1200 x 1200 dpi
	Color Matching	EFI Fiery ColorWise™ Pro Tools; EFI ICC Color Profiles; PANTONE® calibrated
<b>Typefaces</b>	Printer Fonts	86 scalable PCL® fonts; 10 TrueType® fonts; 136 Adobe® PostScript® Type 1 fonts; 1 Bitmap font; OCRA/B; USPS barcode
<b>Compatibility</b>	Printer Languages	PCL® 5c, PCL XL (Color), Adobe PostScript 3™ with PDF Direct Print (v1.6)
	Connectivity	Hi-Speed USB 2.0 and 10 Base-T/100 Base-TX/1000 Base-T Ethernet with internal Web Server
	Operating Systems	Windows® 7, Vista® (32-/64-bit); XP Professional (32-/64-bit), XP Home, XP Server 2003 x64 (SP1); Server 2003 Standard/Enterprise/Datacenter Editions; 2000 Professional/2000 Server/2000 Advanced Server (all SP4 or later); Mac® OS X PowerPC 10.3.9–10.5, OS X Intel 10.4.4–10.5
	Network Protocols	TCP/IP; NetWare®; EtherTalk
<b>Utilities</b>	Included with Printer	Swatch Utility; EFI Command Workstation™, EFI Job Monitor, EFI Hot Folders™, EFI Spot-On™; PDF Print Direct
<b>Memory</b>	RAM (Standard and Max)	1,024 MB
	Hard Disk Drive	40 GB Standard
<b>Media Handling</b>	Paper Capacity	Standard: 530-sheet tray and 230-sheet multi-purpose tray; Max: 2,880 sheets with options
	Paper Sizes	Tabloid extra (12" x 18"), tabloid (11" x 17"), legal, letter, executive, 3" x 5" index cards, 4" x 6" and 5" x 7" photo paper, A3, A4, A5, A6, B5, C5, DL, Com 10, Monarch envelopes, and banners (up to 12.9" x 47.24")
	Paper Weight	Trays 1 thru 5 – 20 lb. bond–80 lb. cover (75–216 gsm); Multi-purpose tray – 20 lb. bond–190 lb. index (75–330 gsm); Duplex – 20 lb. bond–65 lb. cover (75–188 gsm) for letter and tabloid sheets
	Duplex (2-sided) Printing	Standard
	Paper Feeding	Auto Media Detect, Auto Paper Tray Select, Paper Empty Sensor, Paper Low Sensor
	Paper Output	500 sheets, face down; 200 sheets, face up
<b>Environmental</b>	Size (WxDxH)	23.6" x 24.6" x 18.5" (59.9 cm x 62.5 cm x 46.9 cm)
	Weight	167.5 lb. (76.0 kg) with consumables
	Temperature/Humidity	Operating: 50°F to 89.6°F (10°C to 32°C), 20% to 80% RH; Storage: -4°F to 113°F (-20°C to 45°C), 10% to 90% RH
	Power Consumption	Operating – Typical 780W, Peak <1500W; Standby 200W (average); Power Save 33W
	Noise Level	Operating – 54dB(A) or less; Standby: 42dB(A) or less; Power Save: 28dB(A) (background level)
<b>Options</b>	Accessory (Part Number)	530-sheet 2nd and 3rd Paper Trays (42831301); 1,590-sheet Hi-Cap Feeder (42831501); Printer Cabinet (70050901)
<b>Warranty</b>	Limited Warranty	2-Year On-Site <sup>2</sup> ; 5-Year Digital LED Printheads

Product	Description	Part Numbers			
pro930	Digital Color Printer	120V – 62434901	230V – 62434902		
Toner Cartridges	15,000 pages <sup>3</sup> (Estimated Life)	Cyan – 52123503	Magenta – 52123502	Yellow – 52123501	Black – 52123504
Image Drums	28,000 pages <sup>4</sup> (Estimated Life)	Cyan – 56124903	Magenta – 56124902	Yellow – 56124901	Black – 56124904
Transfer Belt	100,000 pages (Estimated Life)	42931602			
Fuser Unit	100,000 pages (Estimated Life)	120V – 42931701	230V – 42931702		
Waste Toner Box	20,000-page (Estimated Life)	42869401			

<sup>1</sup> Published performance results based on laboratory testing. Individual results may vary.

<sup>2</sup> Available in the U.S. only.


<sup>3</sup> Letter/A4 at 5% coverage. Ships with 15,000-page standard toner cartridges.

<sup>4</sup> Based on 500 pages/job.

**Important Consumables Information:** This product has been designed and engineered to operate only with genuine Oki Data Americas, Inc. consumables. Use of non-genuine consumables will result in the loss of certain printer enhancements, such as Auto Color Balance and Toner Sensor gauge.

**For more information on Digital Color Printers and Supplies from Oki Data Americas, Inc.: 1.800.OKI.DATA (800.654.3282).**

Printed on an OKI proColor™ Series printer

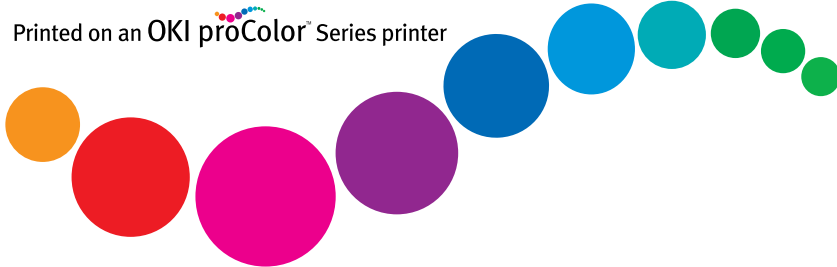

Specifications are subject to change without notice.

Featured products may not be available in all countries. Please contact your local office for regional availability.

© 2010 Oki Data Americas, Inc. OKI Reg. T.M., Oki Electric Industry Co., Ltd. HD Color logo T.M., Single Pass Color T.M., Oki Data Corp. proColor logo T.M., Oki Data Americas, Inc. EFI, Fiery, SmartRIP Reg. T.M., EFI Spot-On, EFI Hot Folders T.M., EFI Inc. PCL Reg. T.M., Hewlett Packard Co. Microsoft, Windows, Vista Reg. T.M., Microsoft Corp. Intel, Celeron Reg. T.M., Intel Corp. PostScript Reg. T.M., PostScript 3 T.M., Adobe Systems, Inc. NetWare Reg. T.M., Novell, Inc. Mac Reg. T.M., Apple Inc. PANTONE Reg. T.M., Pantone LLC.

Printed in the USA  
MS15596-0110

**OKI DATA AMERICAS, INC.**

USA

2000 BISHOPS GATE BLVD.

MOUNT LAUREL, NJ 08054-4620

TEL: 800.OKI.DATA (800.654.3282)

FAX: 856.222.5320

[www.okidata.com/procolor](http://www.okidata.com/procolor)

