



RICOH IM C3000(A) IM C3500(A)

Z Printer Z Copier Z Scanner Z Fax

Welcome to a new era of technology that keeps your workplace up-to-date, now and in the future. Smarter working made simple thanks to the IM C3000(A)/C3500(A).

Now is the time to:

- Protect your devices with easy access to security updates
- Take advantage of easy productivity upgrades at your own pace
- Save costs by bringing high-standard quality print output in-house
- Maximise productivity with streamlined workflows

Today's workplace needs to be ready for tomorrow. Ricoh's intelligent devices provide smooth access to functionality upgrades and productivity enhancements when they are released, without needing to change your hardware. Turn your device into a powerful hub that helps you manage information workflows efficiently, using technology that's scalable, secure, sustainable and simple.

Get greater control of scan and print management:


- Scan smaller documents with the small size paper scan
 unit
- Improve scan accuracy double feed detection unit
- Enhance print management with EFI controller
- Produce professional grade flyers with inner multifolding unit

Embrace lower running costs and reduced energy consumption thanks to environmentally friendly low TEC (Typical Electricity Consumption) values. Furthermore, take advantage of RICOH Intelligent Support services that anticipate potential issues and send corrective instructions via the Smart Operation Panel, avoiding interruptions and prolonging the optimal performance of your device – avoiding the need for intervention by more costly IT resources. Printing from 30 to 35 CPM, the IM C3000(A)/C3500(A) offer next-level productivity. Interact with the 10.1" Smart Operation Panel like a typical smart device and configure it for quick and easy ac-cess to apps you use most often. A variety of mobile connectivity options enable printing or scan-ning to the office network or cloud from a smart device, with built-in support for NFC, AirPrint* or Mopria. All this underpinned by a unique suite of support apps from RICOH Smart Integration.

Our intelligent devices offer:

- Efficient working and reduced user intervention by expanding paper capacity
- Variable finishing and paper options for a professional touch
- A consistent user experience across your fleet
- Maximum device uptime and minimal disruption with RICOH Intelligent Support

IM C3000(A) / IM C3500(A) hardware configuration

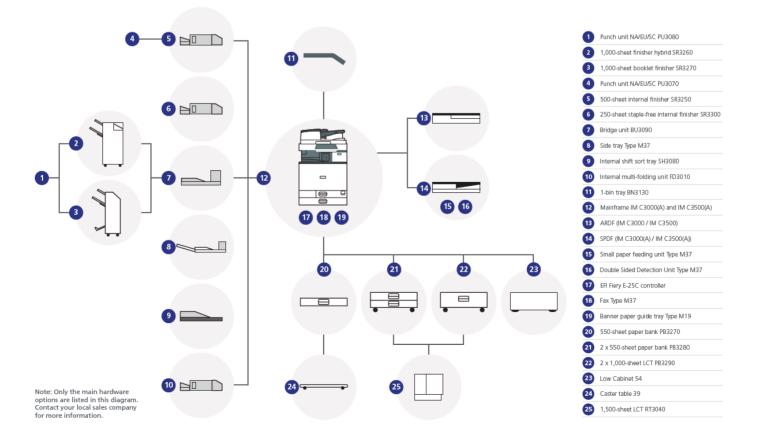

RICOH IM C3000A/IM C3000/IM C3500A/IM C3500

MAIN SPECIFICATIONS

GENERAL	IM C3000A	IM C3000	IM C3500A	IM C3500
Varm-up time		21 se	econds	
irst output speed: B/W		4.5 se	econds	
irst output speed: full colour			econds	
ontinuous output speed	30 ppm	30 ppm	35 ppm	35 ppm
lemory: standard	oo ppin		GB	oo ppm
lemory: maximum		4	GB	
IDD: standard		320) GB	
IDD: maximum		320) GB	
ARDF capacity		100 :	sheets	
SPDF capacity		220 :	sheets	
Weight	99.4 kg	94 kg	99.4 kg	94 kg
Dimensions: W x D x H	587 x 685 x 963 mm	587 x 685 x 913 mm	587 x 685 x 963 mm	587 x 685 x 913 mm
Power source		220 - 240	V, 50/60 Hz	
COPIER				
Aultiple copying	Up to 999 copies			
Resolution	600 dpi			
Zoom	From 25% to 400% in 1% steps			
PRINTER				
CPU	ApolloLake E3930 1.3 GHz			
	ApolloLake E3940 GHz			
	Intel® Apollo Lake Processor GH			
Printer language: standard	PCL5c, PCL6, PostScript 3 (emu			
Printer language: option		M, IPDS, PictBridge, PDF Direct f	from Adobe®	
Print resolution: maximum	1,200 x 1,200 dpi			
Network interface: standard		V1000 base-T, USB Host I/F Typ		
Network interface: option		Vireless LAN (IEEE 802.11a/b/g/r		
Mobile printing capability		e Cloud Print, NFC, Ricoh Smart I		
Windows® environments	Windows® 7, Windows® 8.1, W Windows® Server 2016	indows® 10, Windows® Server 2	2008, Windows® Server 2008R2	, Windows® Server 2012R2,
Mac OS environments	Macintosh OS X Native v10.11 c	or lator		
UNIX environments		O OpenServer, RedHat® Linux E	Interprise IRM® AIX	
SAP® environments	SAP® R/3®, SAP® S/4®	O Openderver, Neurialo Linux L	Interprise, IDING AIX	
Other supported environments	IBM iSeries			
SCANNER				
	90 inm (200/200 dni)			
Scanning speed: ARDF	80 ipm (200/300 dpi)	avi)		
Scanning speed: SPDF	120 ipm (simplex)/240 ipm (duple	ex)		
Resolution: maximum Compression method	1,200 dpi			
File formats	Single Page TIFF (Compression	on, Compression off), Single page	ne JPEG (Compression on). Sinc	le nage PDF (Compression o
		ligh compression PDF (Compres		
		n, Compression off), Multi page F		
	compression PDF (Compression	n on), Multi page PDF/A (Compre	ssion on, Compression off)	
	E-mail, Folder, USB, SD Card, F	TP, E-mail, Folder, USB		
Scan modes				
FAX Dircuit			, PSTN, PBX	
AX Dircuit Transmission speed		2 se	conds	
AX Dircuit iransmission speed Nodem speed: maximum		2 se 33.6	conds Kbps	
FAX Dircuit Transmission speed Modem speed: maximum Resolution: standard		2 se 33.6 8x3.85 line/mi	conds Kbps m, 200x100 dpi	
FAX Dircuit Transmission speed Aodem speed: maximum Resolution: standard Resolution: option		2 se 33.6 8x3.85 line/m 16x15.4 line/m	conds : Kbps m, 200x100 dpi ım, 400x400 dpi	
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method		2 se 33.6 8x3.85 line/m 16x15.4 line/m MH, MR, MMR, JBIG	conds ; Kbps m, 200x100 dpi m, 400x400 dpi ;, MH, MR, MMR, JBIG	
FAX Circuit Iransmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed	81 spm	2 se 33.6 8x3.85 line/m 16x15.4 line/m MH, MR, MMR, JBIG 68 spm	conds ; Kbps m, 200x100 dpi im, 400x400 dpi ;, MH, MR, MMR, JBIG 81 spm	68 spm
Scan modes FAX Circuit Transmission speed Modern speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum	81 spm	2 se 33.6 8x3.85 line/m 16x15.4 line/m MH, MR, MMR, JBIG 68 spm 4 MB, (3	conds ; Kbps m, 200x100 dpi m, 400x400 dpi ;, MH, MR, MMR, JBIG	68 spm

RICOH IM C3000A/IM C3000/IM C3500A/IM C3500

MAIN SPECIFICATIONS

PAPER HANDLING	IM C3000A	IM C3000	IM C3500A	IM C3500		r
Recommended paper size	Standard paper tray(s): SRA3, A3, Letter, Executive, F/GL, Foolscap, Optional paper tray(s): SRA3, A3, A KAI, DLT, Government LG, G LT, E Bypass tray: SRA3, A3, A4, A5, A6	Folio, 16 KAI), Custom size pa \4, A5, A6, B4, B5, B6, Legal, Eng Quatro, COM10, C5, 8K,	aper (With, Length) Letter, Half Letter, Executive, Exec 16K, Envelopes		Adobe [®] PostScript [®] 3 [°]	Adobe: Pl
Paper input: standard	1.200 sheets	, b4, b0, b0, Envelopes, ous			🚷 Bluetooth	RO
Paper input: maximum	4,700 sheets					READ
Paper output: standard	500 sheets					
Paper output: maximum	1,625 sheets					
Paper weight	Trays: (60 - 300 g/m ²), Bypass: (52	- 300 a/m²). Duplex: (52 - 256	6 a/m²)		CERTIFIED	mop
Paper types	Plain paper, Recycle paper, Specia Envelope, Gloss paper, Label pape Letterhead, Cardstock, Pre-printed paper, Thick paper 1, Thick paper 2 Colour paper, Letterhead, Cardstoc OHP, Thin paper, Normal paper, M (Plain paper, Recycled paper, Spec paper: gloss, Envelope, Coated pap 4)	r, OHP, Standard tray(s): (Pla paper, Bond paper, Coated p 2, Thick paper 3, Thick paper 4, Pre-printed paper, Bond pa iddle thick paper, Thick paper sial paper 1-3, Colour paper, L	ain paper, Recycled paper, Special aper: gloss, Envelope, Coated pape 4), Bypass tray: (Plain paper, Recy aper, Coated paper: gloss, Envelop 1, Thick paper 2, Thick paper 3, Th etterhead, Cardstock, Pre-printed p	paper 1-3, Colour paper, er, Normal paper, Middle thick cled paper, Special paper 1-3, e, Coated paper, Label paper, nick paper 4), Optional tray(s): paper, Bond paper, Coated	RICOH @Remote	(intel inside
ECOLOGY						
Power consumption: max.		Less that	an 1,700 W			
Power consumption operation: B/W	503.3 W	503.3 W	532.9 W	532.9 W		
Power consumption operation:	559.7 W	559.7 W	598.6 W	598.6 W		
Full colour Power consumption: ready		47	7.6 W			
Power consumption: sleep			55 W			
TEC	1.1 kWh	1.1 kWh	1.3 kWh	1.3 kWh		
OUTPUT TRAYS AND FINISHE						
1x 550-sheet paper tray	Paper size: (SRA3, A3, A4, A5, A6,		÷ ,			
2x 550-sheet paper tray	Paper size: (SRA3, A3, A4, A5, A6,		50-300 g/m²)			
2,000-sheet Large capacity tray	Paper size: (A4), Paper weight: (60	0 ,				
1,500-sheet side Large capacity tray	Paper size: (A4, B5), Paper weight:	(60-300 g/m²)				
1,000-sheet Hybrid finisher	Paper size: (SRA3, A3, A4, A5, A6, paper size: (A3, A4, A5, B4, B5), S					
1,000-sheet Booklet finisher	Paper size: (SRA3, A3, A4, A5, A6, sheets), Staple paper size: (A3, A4, Booklet)					
250-sheet Internal finisher	Paper size: (A3, A4, A5, A6, B4, B5 paper size: (A3, A4, A5, B4, B5), S			aple capacity: (5 sheets), Staple		
500-sheet Internal finisher	Paper size: (A3, A4, A5, A6, B4, B5 paper size: (A4, A5, B4, B5), Staple					
Internal shift tray	Tray capacity: (250 sheets), Paper	size: (SRA3, A3, A4, A5, A6, I	B4, B5, B6), Paper weight: (52-300	g/m²)		
One-bin tray	Tray capacity: (125 sheets), Paper	size: (A3, A4, A5, B3, B4), Pa	per weight: (52-300 g/m²)			
OTHER OPTIONS						

security HDD, Data overwrite security unit, Small paper feeding unit, Page keeper, Imageable area extension unit, ADF handle, External keyboard bracket, Counter I/F unit, Key counter bracket, NFC card reader, Smart card reader built-in unit, EFI controller, EFI Impose, EFI Compose, EFI Hot folders, EFI Spot on

CONSUMABLES			
Toner (black)	31,000 prints		
Toner: cyan/magenta/yellow Consumable yield based on 2p/j 6% coverage on A4	19,000 prints		

*Airprint certification will be available in 2019.





All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. Images in this brochure are not real photographs and slight differences in detail might appear. Copyright © 2018 Ricoh Europe PLC. All rights reserved. This brochure, its contents and layout may not be modified and/or adapted, without the prior written permission of Ricoh Europe PLC.