

# HP LaserJet Enterprise M606 series




**A powerhouse printer loaded with manageability, energy savings, and mobile printing features.<sup>2</sup>**

Propel business results and produce outstanding print quality. Tackle large jobs and equip workgroups for success—wherever business leads.<sup>2</sup> Easily manage and expand this ultra-fast, versatile printer—and help reduce environmental impact.



**HP LaserJet Enterprise M606dn**



**HP LaserJet Enterprise M606x**

### Take productivity to the next level

- Equip users to fly through tasks with the intuitive 4.3-inch (10.9 cm) color touchscreen and PIN printing.
- Meet high-volume needs with automatic two-sided printing and versatile paper trays—up to 3600 sheets.<sup>4</sup>
- Improve efficiency. Add paper-handling accessories to presort jobs, print on different media, and more.<sup>5</sup>
- Print uninterrupted for longer periods of time with high-yield Original HP LaserJet cartridges.<sup>6</sup>

### Meet business needs in the office and beyond

- Enable wireless direct printing in the office—from mobile devices—without accessing the network.<sup>7</sup>
- Print with just a touch of your NFC-enabled mobile device to this printer—no network needed.<sup>8</sup>
- Easily print from a variety of smartphones and tablets—generally no setup or apps required.<sup>2</sup>
- Easily print from virtually anywhere in the office with Ethernet and optional wireless connectivity.<sup>9</sup>

### Advanced capabilities, easy management

- Easily expand this printer as solutions advance and workgroup needs grow, using add-on, updatable features.
- Protect sensitive data—at rest or in transit—with a variety of embedded and optional security solutions.<sup>10</sup>
- Easily take command of your printing environment from one central location—with HP Web Jetadmin.<sup>11</sup>
- Quickly troubleshoot problems using cloud-based help services that are relevant and up to date.<sup>12</sup>

### Less energy, more efficiency and savings


- Save energy—HP Auto-On/Auto-Off Technology turns your printer on when you need it and off when you don't.<sup>13</sup>
- Conserve resources—this printer has lower typical electricity consumption than any device in its class.<sup>14</sup>
- Help save time and money with lightweight HP EcoFFICIENT paper—engineered for clean, trouble-free printing.
- Help reduce your impact. Count on easy, free cartridge recycling through HP Planet Partners.<sup>1</sup>

<sup>1</sup> Program availability varies. Original HP cartridge return and recycling is currently available in more than 49 countries, territories, and regions in Asia, Europe, and North and South America through the HP Planet Partners program. For more information, visit [hp.com/recycle](http://hp.com/recycle) <sup>2</sup> Local printing requires mobile device and printer be on the same network or have a direct wireless connection. Wireless performance is dependent on physical environment and distance from access point. Wireless operations are compatible with 2.4 GHz operations only. Remote printing requires an Internet connection to an HP Web-connected printer. App or software and HP ePrint account registration may also be required. Wireless broadband use requires separately purchased service contract for mobile devices. Check with service provider for coverage and availability in your area. See [hp.com/go/mobileprinting](http://hp.com/go/mobileprinting) for more details. Some features require purchase of an optional accessory, available Fall 2015. <sup>3</sup> Printing speed measured using ISO/IEC 24734 and excludes first set of test documents. For more information, see [hp.com/go/printerclaims](http://hp.com/go/printerclaims). Exact speed varies depending on the system configuration, software application, driver, and document complexity. <sup>4</sup> 3600-sheet input capacity requires purchase of additional accessories. <sup>5</sup> Optional paper-handling accessories must be purchased separately. <sup>6</sup> The optional high-yield Original HP LaserJet cartridge must be purchased separately. <sup>7</sup> Wireless direct printing is standard on the HP LaserJet Enterprise M606x only. Requires purchase of optional module, available Fall 2015, for the LaserJet Enterprise M606dn. Mobile device needs to be connected directly to the Wi-Fi network of a wireless direct-capable multi-function printer (MFP) or printer prior to printing. Depending on mobile device, an app or driver may also be required. Wireless performance is dependent on physical environment and distance from the access point in the MFP or printer. For details, see [hp.com/go/businessmobileprinting](http://hp.com/go/businessmobileprinting) <sup>8</sup> Touch-to-print capability is standard on the HP LaserJet Enterprise M606x only. Requires purchase of optional HP Jetdirect 3000w near-field communications (NFC)/Wireless Accessory, available Fall 2015, for the LaserJet Enterprise M606dn. Mobile device must support NFC-enabled printing. For more information, see [hp.com/go/mobileprinting](http://hp.com/go/mobileprinting) <sup>9</sup> Wireless Internet connectivity requires purchase of an optional accessory, available Fall 2015, for the M606dn. Wireless performance is dependent on physical environment and distance from access point. Wireless operations are compatible with 2.4 GHz routers only. <sup>10</sup> Some solutions require download or additional purchase. Learn more at [hp.com/go/printingsolutions](http://hp.com/go/printingsolutions). The encrypted hard disk drive (HDD) requires an additional purchase. <sup>11</sup> Universal device plug-in is offered with HP Web Jetadmin 10.3 SR4 and higher. HP Web Jetadmin is free and available for download at [hp.com/go/webjetadmin](http://hp.com/go/webjetadmin) <sup>12</sup> Online help must be enabled on the printer or MFP. Mobile device must have an Internet connection to access online services. <sup>13</sup> HP Auto-On/Auto-Off Technology capabilities are subject to printer and settings. <sup>14</sup> Based on HP testing using the ENERGY STAR® program's Typical Electricity Consumption (TEC) method or as reported in [energystar.gov](http://energystar.gov) vs. competitive single-function black-and-white laser printers with print speeds between 56 and 70 pages per minute (ppm) as of November 2014. Actual results may vary.

## HP LaserJet Enterprise M606x

### Product walkaround

1. Intuitive 4.3-inch (10.9 cm) color touchscreen tilts up for easier viewing (Available on the X bundle only)
2. 600-sheet output bin
3. Top cover (access to the toner cartridge)
4. 100-sheet multipurpose tray 1
5. 500-sheet input tray 2
6. 500-sheet input tray 3
7. Hardware Integration Pocket (HIP)
8. Easy-access USB port
9. On/off button
10. Output accessory cover
11. 512 MB standard memory (upgradeable to 1.5 GB) and a 1.2 GHz processor
12. Access port for optional Kensington style lock
13. Local area network (LAN) Ethernet (RJ 45) network port
14. Hi-speed USB 2.0 printing port
15. USB port for connecting external USB devices
16. Power connection
17. Automatic duplexer

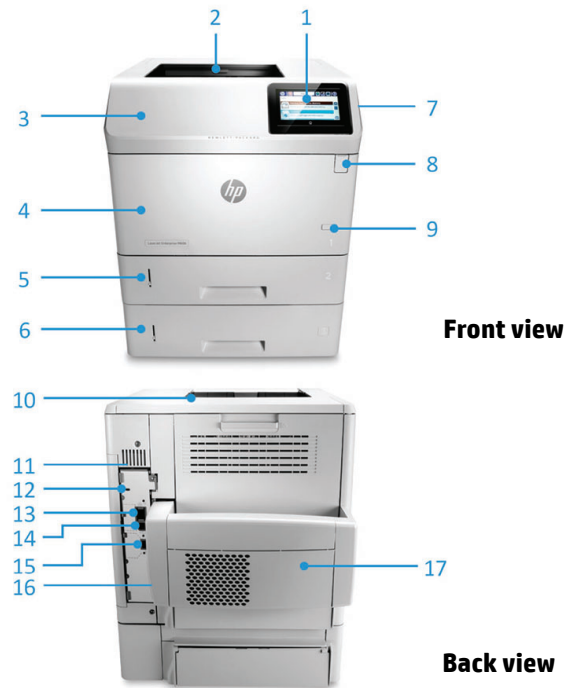

### Series at a glance



Model	HP LaserJet Enterprise M606dn	HP LaserJet Enterprise M606x
<b>Product number</b>	E6B72A	E6B73A
<b>Print speed in ppm, letter/A4<sup>3</sup></b>	65/62	65/62
<b>Control panel</b>	4-line LCD with keypad	4.3-inch (10.9 cm) color touchscreen
<b>100-sheet multipurpose tray and 500-sheet tray</b>	✓	✓
<b>500-sheet tray 3</b>	Optional	✓
<b>Up to three 1 x 500-sheet input feeders and 1,500-sheet high capacity input tray<sup>4</sup></b>	Optional (up to a maximum of 6 trays total)	Optional (up to a maximum of 6 trays total)
<b>Touch-to-print<sup>5</sup> and wireless direct<sup>7</sup> mobile printing</b>	Optional	✓
<b>High-Performance Secure Hard Disk</b>	Optional	Optional
<b>Automatic duplexer</b>	✓	✓
<b>Support for high-capacity toner cartridge<sup>6</sup></b>	✓	✓
<b>ENERGY STAR certified</b>	✓	✓

## HP Services

Downtime can have serious consequences, so HP provides support beyond the standard warranty. You benefit from reduced risk, maximized uptime, predictable service delivery and no unbudgeted repair costs. HP Care Pack Services provide a comprehensive suite of protection services designed to keep HP hardware and software up and running so employees can stay productive.

### Next Business Day with Defective Media Retention:

Customers can retain their hard disk drive and keep control of sensitive data.

### Same Day – 4 hour 9x5 and 13x5:

Sends an HP technician to customers' site the same business day for repair, within 4 hours, if the issue cannot be resolved through remote support. Various support window times are available, for different requirements.

### Next Business Day Exchange:

Exchange of hardware at customers' premise the next business day, if the issue cannot be resolved remotely.

### Installation Service with Network Setup:

Installation services that include onsite installation and network setup of printing product.

For carepack availability visit: [hp.com/go/cpc](http://hp.com/go/cpc)



## Top features

Stay ahead of schedule with this fast and versatile printer—up to 65 pages per minute (ppm).<sup>3</sup> Easily meet high-volume demands and provide flexible options for different users and paper sizes.

Business is mobile, and so is your workforce. Keep workgroups covered—at their desk, on the way to the office, or stepping off a plane for an important meeting—with easy printing from mobile devices.<sup>2</sup>

Streamline fleet management—while giving workgroups the tools to support larger business initiatives. Extend print capabilities as business evolves, enhance security, and customize new solutions seamlessly.

Shrink your energy use while helping your company save money. This HP LaserJet Enterprise printer is designed for low energy consumption. Keep the printing process efficient and produce less waste.

---

### Accessories

F2G68A - HP LaserJet 500-Sheet Input Tray Feeder  
 F2G69A - HP LaserJet Auto Duplexer Two Side Print  
 F2G70A - HP LaserJet Printer Stand  
 F2G72A - HP LaserJet 500-Sheet Stacker Stapler  
 F2G73A - HP LaserJet 1500-Sheet Input Tray  
 F2G74A - HP LaserJet 75-Sheet Envelope Feeder  
 F2G75A - HP LaserJet Custom Media Cassette Accessory  
 F2G81A - HP LaserJet 500-Sheet 5-Bin Mailbox  
 B5L28A - HP Two Internal USB Ports  
 B5L29A - HP Secure High Performance Hard Disk Drive  
 G6W84A - HP 1GB 90-Pin DDR3 Slim DIMM  
 F5S62A - HP Trusted Platform Module  
 Q3216A - HP 1000-staple Cartridge

### Supplies

F2G76A - HP LaserJet Printer 110V Maintenance Kit (225K yield)  
 F2G77A - HP LaserJet Printer 220V Maintenance Kit (225K yield)  
 CF281A - HP 81A Black Original LaserJet Toner Cartridge (~10,500 pages)  
 CF281X - HP 81X High Yield Black Original LaserJet Toner Cartridge (~25,000 pages)

---

### Services

#### HP LaserJet Enterprise M606 Series

U8CJ8E - HP 3 year Next Business Day + Defective Media Retention LaserJet M606 Hardware Support  
 U8CK0E - HP 3 year 4 hour 13x5 + Defective Media Retention LaserJet M606 Hardware Support  
 U8CK1E - HP 3 year Next Business Day Exchange + Defective Media Retention LaserJet M606 Service  
 U8CJ9E - HP 3 year 4 hour 9x5 + Defective Media Retention LaserJet M606 Hardware Support  
 U8CK2E - HP 3 year Return + Defective Media Retention LaserJet M606 Service  
 UC742E - Installation for 1 Network Configuration for Personal or Workgroup printer

---

<sup>2</sup> Local printing requires mobile device and printer be on the same network or have a direct wireless connection. Wireless performance is dependent on physical environment and distance from access point. Wireless operations are compatible with 2.4 GHz operations only. Remote printing requires an Internet connection to an HP Web-connected printer. App or software and HP ePrint account registration may also be required. Wireless broadband use requires separately purchased service contract for mobile devices. Check with service provider for coverage and availability in your area. See [hp.com/go/mobileprinting](http://hp.com/go/mobileprinting) for more details. Some features require purchase of an optional accessory, available Fall 2015. <sup>3</sup> Printing speed measured using ISO/IEC 24734 and excludes first set of test documents. For more information, see [hp.com/go/printerclaims](http://hp.com/go/printerclaims). Exact speed varies depending on the system configuration, software application, driver, and document complexity.

# HP LaserJet Enterprise M606 series

Technical Specifications	HP LaserJet Enterprise M606dn(E6B72A)	HP LaserJet Enterprise M606x(E6B73A)
<b>AIO Functions</b>	Print	
<b>Print speed</b>	Letter: Up to 65 ppm black; <sup>5</sup> First Page Out Black: As fast as 7 sec; <sup>6</sup>	
<b>Print resolution</b>	Black (best): Up to 1200 x 1200 dpi	
<b>Print Technology</b>	Laser; <b>Print Resolution Technologies:</b> HP ImageREt 3600 (600 x 600 dpi), HP ProRes 1200 (1200 x 1200 dpi)	
<b>Print Cartridges Number</b>	2 (black)	
<b>Standard Print Languages</b>	HP PCL 6, HP PCL 5e, HP Postscript Level 3 emulation, native PDF printing (v 1.7)	
<b>Printer Smart Software Features</b>	HP ePrint, Apple AirPrint, HP Auto-On/Auto-Off Technology, HP FutureSmart Firmware, Easy Access USB, Hardware Integration Pocket, Open Extensibility Platform, HP Web Jetadmin, HP Universal Print Driver, 4-line color display control panel	HP ePrint, Apple AirPrint, HP Auto-On/Auto-Off Technology, HP FutureSmart Firmware, Easy Access USB, Hardware Integration Pocket, Open Extensibility Platform, HP Web Jetadmin, HP Universal Print Driver, 4.3" color touchscreen control panel
<b>Printer Management</b>	Printer Administrator Resource Kit (Driver Configuration Utility, Driver Deployment Utility, Managed Printing Administrator); HP Web Jetadmin Software; HP Proxy Agent Software; HP Imaging and Printing Security Center; HP Utility	
<b>Standard Connectivity</b>	(Mac) Hi-Speed USB 2.0 ports (Host and Device); built-in Gigabit Ethernet 10/100/1000T network port; Hardware Integration Pocket (HIP)	
<b>Network Capabilities</b>	Via HP Jetdirect Ethernet embedded print server (standard) supports: 10Base-T, 100Base-Tx, 1000Base-T; 802.3az (EEE) support on Fast Ethernet and Gigabit Ethernet; IPsec (standard)	Embedded NFC/HP Wireless Direct support
<b>Network Ready</b>	Standard (built-in Gigabit Ethernet)	
<b>Wireless Capability</b>	Optional, enabled with purchase of a pending hardware accessory	Yes, embedded NFC/HP Wireless Direct support
<b>Mobile Printing Capability</b>	HP ePrint, Apple AirPrint™ TM	HP ePrint, Apple AirPrint™ TM, Touch to Print, Wireless Direct
<b>Memory</b>	<b>Standard:</b> 512 MB, <b>Maximum:</b> 1.5 GB	
<b>Mass Storage</b>	4GB non-volatile storage, Firmware encryption (AES 128 or AES 256) of customer/job data; Secure Cryptographic Erase – Job Data, Secure Erase	
<b>Processor Speed</b>	1.2 GHz / <b>Hard disk:</b> Optional, 500 GB HP Secure High Performance Hard Disk Drive	
<b>Duty Cycle</b>	<b>Monthly, letter:</b> Up to 275,000 pages <sup>7</sup> ; <b>Recommended Monthly Page Volume:</b> 5000 to 20,000 <sup>8</sup>	
<b>Paper Handling</b>	<b>Input Capacities:</b> 100-sheet multipurpose tray 1, 500-sheet input tray 2, 500-sheet input tray 3 (M606x), Automatic duplexer for two-sided printing; Up to 600 sheets standard labels legal (M606dn); Up to 1100 standard labels legal (M606x); <b>Output Capacities:</b> 500-sheet output bin; 100-sheet rear output bin; Up to 600 sheets (500 in the face down bin, 100 in rear face up door) standard labels legal; <b>Duplex Options:</b> Yes; <b>75;</b> <b>Standard Paper Trays:</b> 2 (M606dn); 3 (M606x); <b>Media Types Supported:</b> Paper (bond, color, letterhead, plain, preprinted, prepunched, recycled, rough, light), envelopes, labels, cardstock, transparencies, shelf edge labels, user-defined; <b>Media Weight Supported:</b> Multipurpose tray 1: 16 to 53 lb; Tray 2, optional 500-sheet input tray, optional Custom media cassette, optional 1500-sheet High-capacity input tray: 16 to 32 lb; Optional Envelope feeder: 20 to 28 lb; Optional Duplexer: 16 to 32 lb; <b>Media Sizes Supported:</b> Multipurpose tray 1: letter, legal, executive, statement, 8.5 x 13 in, 3 x 5 in, 4 x 6 in, 5 x 7 in, 5 x 8 in, envelope (commercial No. 9, No. 10, Monarch), US postcard; Tray 2, optional 500-sheet input tray: letter, legal, executive, 8.5 x 13 in; optional 1500-sheet High-capacity Input tray: letter, legal; <b>Media Sizes Custom:</b> Multipurpose tray 1: 3 x 5 to 8.5 x 14 in; Tray 2, optional 500-sheet input tray: 5.83 x 8.27 to 8.5 x 14 in; Optional Custom media cassette: 4.02 x 5.83 to 6.69 x 11.10 in	
<b>Product Dimensions</b>	<b>W x D x H:</b> 16.7 x 21.1 x 15.7 in; <b>Maximum:</b> 16.7 x 33 x 22.5 in	<b>W x D x H:</b> 16.7 x 21.1 x 20.5 in; <b>Maximum:</b> 16.7 x 33 x 27.4 in
<b>Product Weight</b>	57 lb <sup>1</sup>	71.5 lb <sup>1</sup>
<b>What's in the box</b>	HP LaserJet M606; Pre-installed HP Black LaserJet Toner Cartridge; Pre-installed HP Duplexer; Installation guide, Support flyer; Printer documentation and software on CD-ROM; Power cord	
<b>Warranty Features</b>	One-year return to bench	
<b>Energy Efficiency Compliance</b>	Energy Star <sup>®</sup> certified; Blue Angel; CECP; EPEAT <sup>®</sup> Silver	
<b>Control Panel</b>	4-line color LCD display, 3 LED lights (Ready, Data, Attention), buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), 10-key numeric keypad	4.3-in (10.9-cm) touchscreen, LCD (color graphics); 1 Home button
<b>Display Description</b>	4-line LCD (color text and graphics)	
<b>Software Included</b>	Windows OS: HP Software Installer/Uninstaller, HP PCL 6 Printer Driver, HP Device Experience (DXP), HP Update, Product Registration Assist, HP Web Services Assist (HP Connected), Online user manuals; Mac OS: Welcome Screen, (Directs users to HP.com or OS App Store for LaserJet Software), Setup Scan To Folder and Email	
<b>Fonts and Typefaces</b>	105 internal TrueType fonts scalable in HP PCL, 92 internal scalable fonts in HP postscript Level 3 emulation (Euro symbol built-in); 1 internal Unicode Fonts (Andale Mono WorldType); 2 internal Windows Vista 8 Fonts (Calibri, Cambria); additional font solutions available via third-party flash memory cards; HP LaserJet Fonts and IPDS Emulation available at hp.com/go/laserjetfonts	
<b>Compatible Operating Systems</b>	Windows OS compatible with In-Box Driver: Windows XP SP3 all 32-bit editions (XP Home, XP Pro, etc.), Windows Vista all (32-bit) editions (Home Basic, Premium, Professional, etc.), Windows 7 all (32-bit, 64-bit) editions; Windows 8/8.1 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (Home Basic, Premium, Professional, etc.), Windows 7 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets); Mac OS (HP Print Drivers available from HP.com and Apple Store): OS X 10.7 Lion, OS X 10.8 Mountain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; Mobile OS (In-OS drivers): iOS, Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Linux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX <sup>10</sup>	
<b>Compatible Network Operating Systems</b>	Windows Server 2012 R2 (64-bit only), Windows Server 2012 Cluster Support (64-bit only), Windows Server 2012 (64-bit only), Windows Server 2008 Standard Edition Enterprise Edition (32-bit), Windows Server 2008 (SP2) (64-bit), Windows Server 2008 SP2 (32-bit), Windows Server 2008 Server Terminal Services (64-bit), Windows Server 2008 Server Terminal Services (32-bit), Windows Server 2008 R2 Standard Edition Enterprise Edition (64-bit only), Windows Server 2008 R2 (SP1) (64-bit only), Windows Server 2008 Enterprise Edition (64-bit), Windows Server 2003 Standard Edition (64-bit), Windows Server 2003 Standard Edition Enterprise Edition (64-bit), Windows Server 2003 Standard Edition Enterprise Edition (32-bit), Windows Server 2003 Enterprise Edition (64-bit), Windows Server 2003 Enterprise Edition (32-bit), Windows Server 2003 R2 Standard Edition Enterprise Edition (64-bit), Windows Server 2003 R2 - Cluster Support (32-bit), Windows Server 2003 R2 - Cluster Support (64-bit), Windows Server 2003 R2 - Cluster Support (32-bit), Windows Server 2003 R2 - Cluster Support (64-bit), Windows Server 2003 R2 - Cluster Support (32-bit), Windows Server 2003 R2 - Cluster Support (64-bit), Citrix MetaFrame <sup>®</sup> Presentation Server 3.0, Citrix Microsoft Windows Server 2008 Terminal Services, Citrix MS Windows Server 2003 Terminal Services, Citrix MS Windows Server 2003 Terminal Services (32-bit, 64-bit), Citrix MS Windows Server 2008 R2 Terminal Services, Citrix MS Windows Server 2008 Terminal Services (32-bit, 64-bit), Citrix Presentation Server 4.0, Citrix Presentation Server 4.0 (32-bit, 64-bit), Citrix Presentation Server 4.5, Citrix Presentation Server™ 4.5, Citrix XenApp 5.0, Citrix XenApp 5.0, Citrix XenApp 5.0 Feature Pack 2 & 3 (32-bit, 64-bit), Citrix XenApp 5.0 Feature Pack 2 & 3 (32-bit, 64-bit), Citrix XenApp 6.0, Citrix XenApp 6.5, Citrix XenDesktop 5.6 (32-bit, 64-bit), HP-LUX 10.20, 11.x, 11.i, IBM AIX 3.2.5 or higher, Linux Red Hat 7.x or higher, Linux SuSE 8.x or higher, Novell NetWare 6.5 (SP8) minimum for full Vista, Novell NetWare 6.5 (SP8) minimum for full Win7, Novell NetWare 6.5 SP8 minimum for full XP (SP7 if only XP), Novell iPrint Client v5.4 for Vista (x86 and x64), Novell iPrint Client v5.4 for Win7 (x86 and x64), Novell iPrint Client v5.4 for Win XP (x86 and x64), Novell Open Enterprise Server 2 (Linux), Solaris 2.5 or higher (SPARC systems only)	
<b>Minimum System Requirements</b>	<b>PC:</b> Windows XP (SP3) all 32-bit editions (XP Home, XP Pro, etc.), Windows Vista all 32-bit editions (Home Basic, Premium, Professional, etc.), Windows 7 all 32-bit and 64-bit editions; Windows 8/8.1 all 32-bit and 64-bit editions (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit editions (excluding RT OS for Tablets); Windows OS compatible with Universal Print Driver (From HP.com); Windows XP (SP3) 32-bit and 64-bit editions (XP Home, XP Pro, etc.), Windows Vista all 32-bit and 64-bit editions (Home Basic, Premium, Professional, etc.), Windows 7 all 32-bit and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit editions (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Linux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; CD-ROM or DVD drive, or Internet connection; Dedicated USB or network connection or Wireless connection; 200 MB available hard disk space; OS compatible hardware (For OS hardware requirements see microsoft.com); <b>MAC:</b> Mac OS X 10.7 Lion, OS X 10.8 Mountain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB available hard disk space; OS compatible hardware (For OS hardware requirements see apple.com)	
<b>Power</b>	<b>Power Supply Type:</b> Internal (Built-in) power supply; <b>Power Requirements:</b> 110-volt input voltage: 100 to 127 VAC (+/- 10%), 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varies by part number with # Option code identifier); <b>Power Consumption:</b> 870 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual Off), 0.7 watts (Auto-Off/Wake on LAN), <0.1 watts (Auto-Off/Manual On) <sup>2</sup>	
<b>Acoustics</b>	<b>Acoustic Power Emissions:</b> 7.1 dB(A); <b>Acoustic Pressure Emissions:</b> 56 dB(A) <sup>3</sup>	
<b>Operating Environment</b>	<b>Operating Temperature Range:</b> 59 to 89.6°F; <b>Recommended Operating Temperature Range:</b> 59 to 89.6°F; <b>Storage Temperature Range:</b> -22 to 140°F; <b>Non-Operating Humidity Range:</b> 10 to 90% RH; <b>Operating Humidity Range:</b> 10 to 80% RH; <b>Recommended Humidity Operating Range:</b> 10 to 80% RH	
<b>Security Management</b>	Identity management: Kerberos authentication, LDAP authentication, 1000 user PIN codes, optional HP and 3rd party advanced authentication solutions (e.g., badge readers); Network: IPsec/firewall with Certificate, Pre-Shared Key, and Kerberos authentication, Supports WJA-10 IPsec configuration Plug-in, 802.1X authentication (EAP-PEAP EAP-TLS), SNMPv3, HTTPS, Certificates, Access Control List; Data: Storage Encryption, Encrypted PDF & Email (uses FIPS 140 validated cryptographic libraries from Microsoft), Secure Erase, SSL/TLS (HTTPS), Encrypted Credentials; Device: Security lock slot, USB port disablement, hardware integration pocket for security solutions; Security management: Compatible with HP Imaging and Printing Security Center	

<sup>1</sup> With cartridges <sup>2</sup> Power requirements are based on the country/region where the printer is sold. Do not convert operating voltages. This will damage the printer and void the product warranty. <sup>3</sup> Declared yield value in accordance with ISO/IEC 19752 and continuous printing. Actual yields vary considerably based on images printed and other factors. For details see hp.com/go/learnaboutsupplies. <sup>4</sup> Acoustic values are subject to change. For current information see hp.com/support. Configuration tested: M604dn, simplex printing, A4 paper at an average of 50 ppm. <sup>5</sup> Measured using ISO/IEC 24734, excludes first set of test documents. For more information, see hp.com/go/printerclaims. Exact speed varies depending on the system configuration, software application, driver, and document complexity. <sup>6</sup> Measured using ISO/IEC 17629. For more information, see hp.com/go/printerclaims. Exact speed varies depending on the system configuration, software application, driver, and document complexity. <sup>7</sup> Duty cycle is defined as the maximum number of pages per month of imaged output. This value provides a comparison of product robustness in relation to other HP LaserJet or HP Color LaserJet devices, and enables appropriate deployment of printers and MFPs to satisfy the demands of connected individuals or groups. <sup>8</sup> HP recommends that the number of printed pages per month be within the stated range for optimum device performance, based on factors including supplies replacement intervals and device life over an extended warranty period. <sup>9</sup> HP SureSupply alerts you when your print cartridge is running low and helps you purchase online or locally through HP or a participating retailer. Only available with Original HP supplies; Internet access required. To learn more, visit hp.com/go/SureSupply. <sup>10</sup> Not all Compatible Operating Systems are supported with In-box software. Full solution software available only for Windows 7 and newer. Legacy Windows Operation Systems (XP, Vista, and equivalent servers) get print and Scan drivers only. Windows RT OS for Tablets (32-bit, 64-bit) uses a simplified HP print driver built into the RT OS. UNIX modelscripts are available on hp.com (Modelscripts are printer drivers for UNIX operating systems). Linux systems use in-OS HPLIP software.

## Learn more at [hp.com](http://hp.com)

© Copyright 2015 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. Windows is a registered trademark of Microsoft Corporation. AirPrint, iPad, iPhone, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Linux is a U.S. registered trademark of Linus Torvalds. UNIX is a registered trademark in the United States and other countries, licensed exclusively through X/Open Company Ltd. Citrix is a registered trademark of Citrix Systems, Inc. in the United States and other countries. PostScript is a registered trademark of Adobe Systems Incorporated.

